Release Notes

 $\begin{array}{c} 4800/5150 \; \text{Power Control Series} \\ \text{February 2006} \\ 450\text{-}0158 \text{A} \end{array}$

Contents

Introduction	. 2
New Features and Enhancements	. 2
4800 Power Control Series Support	. 2
Advanced Security Options	. 2
4800/5150 Management Methods	. 3
4800 LX Series Notes and Restrictions	. 3
Megavision Support	. 3
Setting the 4800 to Factory Defaults	. 3
Defaulting the LX Async Port	. 3
Boot Sequencing	
Cluster Search and Explore	
5150 LX Series Notes and Restrictions	. 4
Defaulting the LX Async Port	. 4
5150 Amperage Limitations	. 4
Current Monitoring	
Issue Fixed in Release V1.0k	
Issue Fixed in Release V1.0j	. 6

450-0158

Introduction

These release notes provide important information about the 4800/5150 Power Control series product line. They cite supported features as well as any notes and restrictions for the following software version:

- 4800 Software Image Version 5.3d
- 5150 Software Image Version 1.0k

IMPORTANT

This release enables you to authenticate SCP (Serial Command Protocol) between the 4800/5150 and a serial device. Once you set the username and password (be sure to record them both), the connection will only work on a serial device with that specific username and password enabled.

If you disable the CLI after setting an SCP admin username and password, the only way to recover is to reset to 4800/5150 defaults via the factory reset button.

New Features and Enhancements

The following new features are supported in this release of the LX software:

4800 Power Control Series Support

The new 4800 Power Control Series is available in 4-outlet, 12-outlet, and 16-outlet configurations.

Advanced Security Options

NOTE: These options are for use with the LX Series only. Although these commands exist on the 5150 CLI, they are normally administered from the LX-Series unit.

When you are managing an 5150 with an LX-Series unit, you can take security measures to restrict access to the 5150 CLI. The commands listed below detail enhanced security options available on the 5150.

- SET BUTTON Enables or disables the reset button
- SET CLI Enables or disables the CLI
- SET SCP Enables or disables SCP (Serial Command Protocol)
- SET SCP AUTH Enables or disables SCP authorization

Each of these commands has a corresponding SHOW command. Refer to the *Getting Started* with the 5150 Power Control Series manual for details on all the new commands.

2 450-0158

4800/5150 Management Methods

Two management methods are available to control the 4800/5150 Series products:

1. Telnet to the serial port connected to the 4800/5150 and manage the product with a CLI session. Use this management method when the 4800/5150 is connected to the IR series of products.

NOTE: Refer to Getting Started with the 5150 Power Control Series when the 5150 Power Control Series unit is connected to an 8000/9000 unit. Refer to Getting Started with the 4800 Power Control Series when the 4800 Power Control Series unit is connected to an 8000/9000 unit.

2. Manage the 4800/5150 using the CLI commands or web interface found on the LX series products. Power commands on the LX are available to control the 4800/5150 when the serial port connecting the 4800/5150 is configured to 'Power Master'.

NOTE: Refer to the *LX-Series Configuration Guide* for Power Management commands when the 4800/5150 Power Control series unit is connected to an LX unit.

4800 LX Series Notes and Restrictions

Megavision Support

This release does not support SNMP for Megavision.

Setting the 4800 to Factory Defaults

When the 4800 is set to Factory defaults, the 4800 disables SCP. SCP must be re-enabled at the 4800's own CLI. Defaulting the 4800 resets parameters such as SCP Authentication, SCP username and password, Power CLI, the factory reset button setting, Power boot sequence, and outlet states.

Defaulting the LX Async Port

Defaulting only the LX async port removes the locally stored single point of control parameters (outlet names, outlet groups and the like). All outlet groups associated solely to that single LX port are removed. Outlets associated to the defaulted LX port are removed from other outlet groups that may span several other LX ports configured for power management.

Boot Sequencing

Boot Sequencing to utilize the per outlet boot timers requires the "power cli" be disabled. Additionally, the "wake-up state" for each outlet must be turned off.

450-0158

Cluster Search and Explore

Cluster Search and Explore is not supported in this release.

5150 LX Series Notes and Restrictions

Defaulting the LX Async Port

Defaulting only the LX async port removes the locally stored single point of control parameters (outlet names, outlet groups and the like). All outlet groups associated solely to that single LX port are removed. Outlets associated to the defaulted LX port are removed from other outlet groups that may span several other LX ports configured for power management.

5150 Amperage Limitations

There are several amperage restrictions to consider when using the 5150 Power Control Series.

Input Current Limits

The input cord attached to the 5150 series unit limits total input current capacity. The unit's model number describes the input limitation. For example, the 5150-1108V is limited to 15 Amps of current. The first digit (number 1) in the 1108V number indicates the model is limited to 15 Amps (the "1" in 1108V representing 15). It then follows that the 5150-2108V model is limited to 20 Amps of input current (the "2" in 2108V representing 20). Therefore, any "3100" model, such as 5150-3116VL is limited to 30 Amps of total input current.

Individual Outlet Limits

Current on any individual outlet is not to exceed 10 Amps on a 120V output, or 6 Amps on a 220V output.

4 450-0158

Outlet Group Limits – 120V Model

The combined current consumption for the group of four outlets on a 120V model is not to exceed 15 Amps.

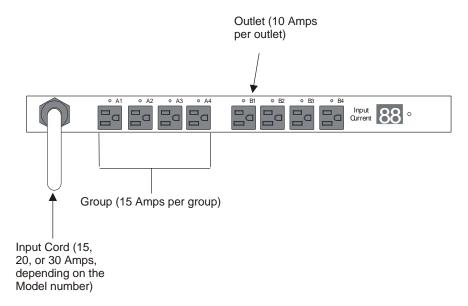


Figure 1 – 120V 5150 Power Control Series Amperage Issues

Outlet Group Limits - 220V Model

The combined current consumption for the group of four outlets on a 208-240V model is not to exceed 10 Amps.

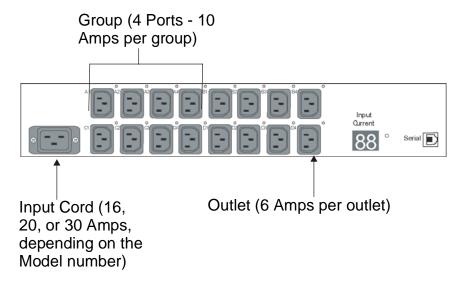


Figure 2 – 208-240V 5150 Power Control Series Amperage Issues

450-0158 5

Current Monitoring

The 2 digit current summary LEDs display current in 1/2-amp increments up to 9.5 amps. The display reports whole amp increments when reporting 10 amps of current and above. The management interfaces, CLI and web, report current in 1/8-amp increments. The two current measurements may report slightly different values due to the limitations of the displays and rounding math.

Issue Fixed in Release V1.0k

NOTE: The present V1.0k release contained no fixes or feature enhancements.

Firmware was modified to support new versions of the internal hardware.

Issue Fixed in Release V1.0j

NOTE: The V1.0j release added functionality only, and contained no fixes.

Previously, user accounts were lost when they were given administrative privileges. This occurred after a restart, followed by adding or changing more users, and then followed by another restart. This has been fixed.

6 450-0158