

4G 2R Transponder

FRM220-4G-2S



The FRM220-4G-2S is a 4G 2R optical regeneration device, which consists of Re-amplification and Re-shaping. The transponder card converts a data signal to the correct wavelength for transmission on a specific channel by supporting SFP optics on both line side and client side interfaces. When the FRM220-4G-2S card is placed in the FRM220 rack with SNMP management, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port and perform diagnostic loop backs.


Features

- Multiple protocol supported at bit rates 28Mbps to 4.25Gbps (Fast Ethernet, Gigabit Ethernet, OC-3, OC-6, OC-12, OC-24, OC-48, STM-1, STM-4 STM-16, FC-1, FC-2, FC-4)
- Network management via Web, Telnet, SNMP in central FRM220 chassis
- Link Fault Pass through (LFP)
- Auto Laser Shutdown (ALS)
- Local configuration via DB9 console port (when placed in CH01M or CH02M)
- Digital Diagnostic monitoring of SFP module
- Perform optical repeater function (Re-amplification, Re-shaping)
- Facility loopback on both Client / Line sides
- Detect transceiver transmitter error Alarm

Specifications

Optical Interface	Connector	SFP LC
	Data rate	28Mbps ~ 4.25Gbps
	Duplex mode	Full duplex
	Fiber	MM 50/125μm, 62.5/125μm. SM 9/125μm
	Distance	MM 2km, SM 15/30/50/80/120km, WDM 20/40/60/80km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B) CWDM 1470 ~ 1610nm
Indications	LED (PWR, Line Link, Client Link, Test, Loop back, Port Active, Alarm)	
Power Input	Card	: 12VDC
	Standalone	: AC, DC options
Power Consumption	< 7W	
Dimension	155 x 88 x 23mm (D x W x H)	
Weight	0.12kg	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, LVD, RoHS	
MTBF	65,000 hrs	

Managed 4G 2R Transponder

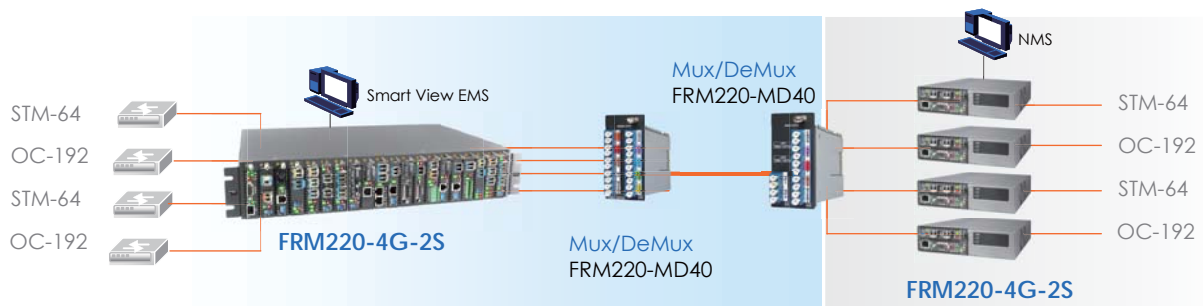

Ordering Information

Model Name	Description
FRM220-4G-2S	4G 2R Transponder, (optional SFP module)

Note: The card is suitable for using in CH01M standalone chassis.