


XFP Transceiver

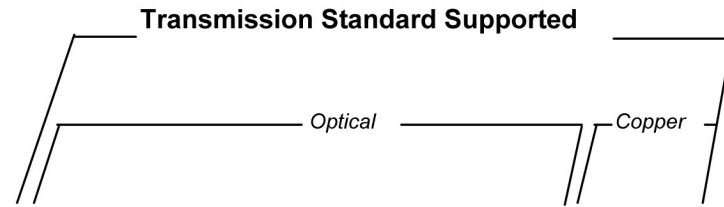

Part Number	Media Type	Operating Wavelength (nm)	Transmitter	Receiver	Data Rate (max.)	Voltage Supply (V)	Optical Fast Ethernet	Optical Gigabit Ethernet	1x Fibre Channel	4x Fibre Channel	OC-3/STM-1	OC-12/STM-4	OC-48/STM-16	OC-192/STM-64	10 Gigabit Ethernet	10x Fibre Channel	1000 Base-T	1000 Base-CX	Case Temperature Range (°C)	Connector	Module Type	Diagnostic Monitoring Interface	Reach
FTRX-1411-3	Single Mode	1310	DFB Laser	APD	10.7 Gb/s									•	•	•			-5 to 70	LC	Pluggable	Digital	10 km
FTRX-1411E3	Single Mode	1310	DFB Laser	APD	10.5 Gb/s										•	•			-5 to 70	LC	Pluggable	Digital	10 km
FTRX-1611-3	Single Mode	1550	EML	Pin	10.7 Gb/s									•	•	•			-5 to 70	LC	Pluggable	Digital	40 km
FTRX-3611-3xx	Single Mode	DWDM C-Band	DWDM EML	Pin	10.7 Gb/s									•	•	•			-5 to 70	LC	Pluggable	Digital	40 km
FTRX-1811-3	Single Mode	1550	EML	APD	10.7 Gb/s									•	•	•			-5 to 70	LC	Pluggable	Digital	80 km
FTRX-3811-3xx	Single Mode	DWDM C-Band	DWDM EML	APD	10.7 Gb/s									•	•	•			-5 to 70	LC	Pluggable	Digital	80 km

Compliant •

XENYA

XENYA d.o.o.
 Celovška cesta 172
 tel.: 01/514 06 10
 www.xenya.si
 prodaja@xenya.si