

## Datasheet

# 155 Mbps SFP Transceiver

## SFP-O3D-XLR



### Features

- 100 - 155 Mbps data rate
- 43 dB minimum link budget
- 1550 nm DFB Class 1 laser
- 150 km reach
- APD Receiver
- SFP MSA compliance (SFF-8074i)
- Digital Diagnostic (SFF-8472)
- GR-253/STM G.957 compliance
- Telecordia GR-468 compliance
- 21CFR 1040.10 and 1040.11 compliance
- Single 3.3 volts power supply
- Commercial temperature availability
- RoHS compliance

### General Operating

Parameter	Symbol	Min.	Typical	Max.	Unit
Supply Voltage	$V_{cc}$	3.135	3.3	3.465	V
Total Current	$I_{cc}$	-	-	300	mA
Power Supply Noise Rejection <sup>a</sup>	PSR	100	-	-	mV <sub>p-p</sub>
Operating Case Temperature	$T_{op}$	-5	-	70	°C
Storage Temperature	$T_{st}$	-40	-	85	°C
Data Rate OC-3/STM-1	DR	-	155	-	Mbps

a) 20 Hz to 155 MHz

### Transmitter Specifications (Optical)

Parameter	Symbol	Min	Typical	Max	Unit
Optical Power	$P_{op}$	1	-	5	dBm
Average Launch Power (Tx: Off)	$P_{off}$	-	-	-45	dBm
Extinction Ratio	ER	10	-	-	dB
Eye Mask	-	SONET/SDH Compliant			
Optical Jitter Generation	$J_{gen}$	-	-	0.002	UI
Optical Rise Time <sup>b</sup>	$t_r$	-	-	1000	ps
Optical Fall Time <sup>b</sup>	$t_f$	-	-	1000	ps
Mean Wavelength	$\lambda$	1500	1550	1580	nm
Spectral Width (20 dB)	$\Delta\lambda$	-	-	1	nm
Side Mode Suppression Ratio	SMSR	30	-	-	dB
Dispersion Penalty (150 km)	DP	-	0.5	2	dB
Relative Intensity Noise	RIN	-	-	-120	dB/Hz
Reflection Tolerance	rp	-24	-	-	dB

b) 20% - 80% values


**Transmitter Specifications (Electrical)**

Parameter	Symbol	Min	Typical	Max	Unit
Input Differential Impedence	$R_{in}$	80	100	120	$\Omega$
PECL Single-Ended Data Input Swing	$V_{in,p-p}$	250	-	1200	mV
TxFault_Fault	$V_{fault}$	2	-	$V_{cc}$	V
TxFault_Normal	$V_{normal}$	$V_{ee}$	-	$V_{ee} + 0.5$	V
TxDisable_Disable	$V_d$	2	-	$V_{cc}$	V
TxDisable_Enable	$V_{en}$	$V_{ee}$	-	$V_{ee} + 0.8$	V

**Receiver Specifications (Optical)**

Parameter	Symbol	Min	Typical	Max	Unit
Receive Power Low <sup>c</sup>	$R_{sens,low}$	-	-	-42	dBm
Receive Power High <sup>c</sup>	$R_{sens,high}$	-10	-	-	dBm
Damage Threshold for Receiver	$P_{in,damage}$	4	-	-	dBm
Wavelength <sup>d</sup>	$\lambda$	1480	-	1580	nm
LOS Assert	LOSA	-52	-	-	dBm
LOS De-assert	LOSD	-	-	-42	dBm
LOS Hysteresis	HYS	0.5	-	-	dB

c) at  $10^{-10}$  BER, PRBS 2<sup>23</sup>-1

d) Operational over 1200 nm to 1625 nm range

**Receiver Specifications (Electrical)**

Parameter	Symbol	Min	Typical	Max	Unit
PECL Single Ended Data Output Swing	$V_{out,p-p}$	185	-	800	mV
Data Output Rise Time	$t_r$	-	-	175	ps
Data Output Fall Time	$t_f$	-	-	175	ps

**Timing and Electrical**

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	$t_{on}$	-	-	5	ms
Tx Disable Assert Time	$t_{off}$	-	-	10	$\mu$ s
Time To Initialize, Including Reset of Tx Fault	$t_{init}$	-	-	300	ms
Tx Fault Assert Time	$t_{fault}$	-	-	100	$\mu$ s
Tx Disable To Reset	$t_{reset}$	10	-	-	$\mu$ s
LOS Assert Time	$t_{loss_{on}}$	-	-	100	$\mu$ s
LOS De-assert Time	$t_{loss_{off}}$	-	-	100	$\mu$ s
Serial ID Clock Rate	$f_{serial\_clock}$	-	-	100	KHz
RX_LOS Voltage (High)	-	2	-	-	V
RX_LOS Voltage (Low)	-	-	-	0.8	V
LOS Output Voltage-Fault	$V_{LOS\ fault}$	2	-	$V_{cc}$	V
LOS Output Voltage-Normal	$V_{LOS\ normal}$	$V_{ee}$	-	$V_{ee} + 0.5$	V
MOD_DEF (0:2)-High	$V_h$	2	-	$V_{cc}$	V
MOD_DEF (0:2)-Low	$V_l$	$V_{ee}$	-	$V_{ee} + 0.5$	V

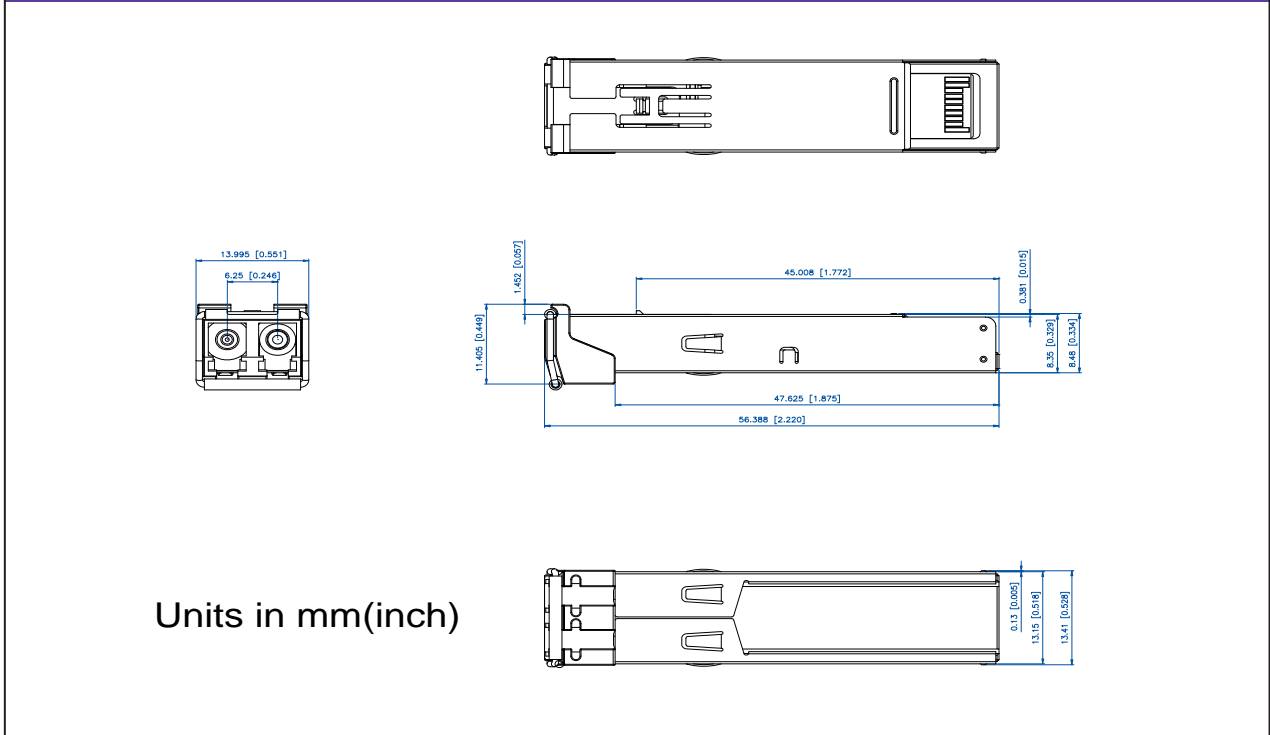

**Digital Diagnostics**

Parameter	Range	Accuracy	Unit	Calibration	Formula
Temperature	-5 to 70	± 3	°C	Internal	$T_c(C) = T_{ad}(16 \text{ bit signed twos complement}) / 256$
Voltage	0 to $V_{cc}$	0.1	V	Internal	$V(\text{Volts}) = V_{ad}(16 \text{ bit unsigned integer}) * 0.1$
Bias Current	0 to 120	5	mA	External	$I(\text{mA}) = I_{slope} * I_{ad}(16 \text{ bit unsigned integer}) + I_{offset}$
TX Power	0 to +5	±3	dBm	External	$TX\_PWR(\mu W) = TX\_PWR_{slope} * TX\_PWR_{ad}(16 \text{ bit unsigned integer}) + TX\_PWR_{offset}$
RX Power	-42 to -10	±3	dBm	External	$RX\_PWR(\mu W) = A_0 + A_1 * x + A_2 * x^2 + A_3 * x^3 + A_4 * x^4$

Pin	Function	Notes
1	$V_{eeT}$	TX GND
2	TX_FAULT	Open Collector
3	TX_DISABLE	Internally Pulled High
4	MOD_DEF2	Serial Data Input
5	MOD_DEF1	Serial Clock Input
6	MOD_DEF0	Internally Grounded
7	NC	Not Connected
8	LOS	Open Collector
9	$V_{eeR}$	RX Ground
10	$V_{eeR}$	RX Ground
11	$V_{eeR}$	RX Ground
12	RXD-	RX Data Negative
13	RXD+	RX Data Positive
14	$V_{eeR}$	RX GND
15	$V_{ccR}$	RX Power
16	$V_{ccT}$	TX Power
17	$V_{eeT}$	TX GND
18	TXD+	TX Data Positive
19	TXD-	TX Data Negative
20	$V_{eeT}$	TX GND



Outline Drawing



Ordering Information

Model	Description	Data Rate (Mbps)	Wavelength (nm)	Bail Latch Color	Distance Range (km)
SFP-O3D-XLR	SFP FE/OC3 Transceiver	100 - 155	1550	Yellow	60 - 170

Warnings

**Handling Precautions:** This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

**Laser Safety:** Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

MRV has more than 50 offices throughout the world. Addresses, phone numbers, and fax numbers are listed at [www.mrv.com](http://www.mrv.com). Please e-mail us at [sales@mrv.com](mailto:sales@mrv.com) or call us for assistance.

**MRV (West Coast USA)**  
 20415 Nordhoff St.  
 Chatsworth, CA 91311  
 800-338-5316  
 818-773-0900

**MRV (East Coast USA)**  
 295 Foster St.  
 Littleton, MA 01460  
 800-338-5316  
 978-952-4700

**MRV (International)**  
 Business Park Moerfelden  
 Waldeckerstrasse 13  
 64546 Moerfelden-Walldorf  
 Germany  
 Tel. (49) 6105/2070  
 Fax. (49) 6105/207-100

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.