

PrintServer 17/600 Printer ThinWire/Twisted-Pair Ethernet, ThickWire/ThinWire Ethernet Installation Sheet

EK-PRTNK-IS. A01


This sheet explains how to install the ThinWire/Twisted-Pair Ethernet card or the ThickWire/ThinWire Ethernet card on the PrintServer 17/600 printer.

Refer to the *PrintServer 17 Printer ThinWire/Twisted-Pair Ethernet Interface Board Installation Guide* (EK-PRT17-DN. A01) for the following information:

- Selecting the correct cable
- Removing the controller board assembly
- Installing the controller board assembly
- Ordering additional documentation

Removing the Current Interface Board


Remove the current interface board by opening the retaining clip ❶ and lifting the board straight up.

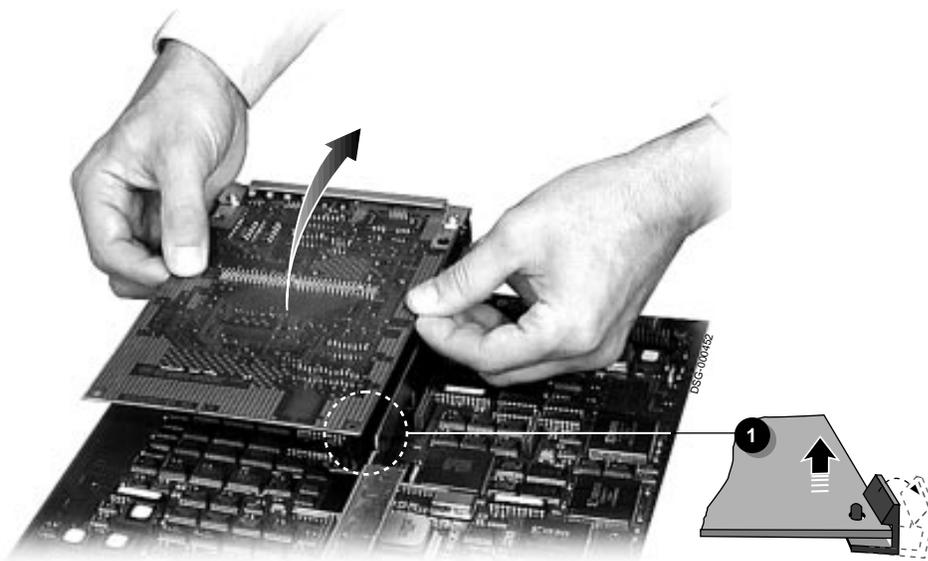

Installing the New Interface Board

To install the new interface board, align the hole of the interface board over the retaining clip on the controller board.

- ✓ Press down on each end of the connector etch ❶.
- ✓ Secure the interface board by pressing down at the retaining clip location (see arrow).

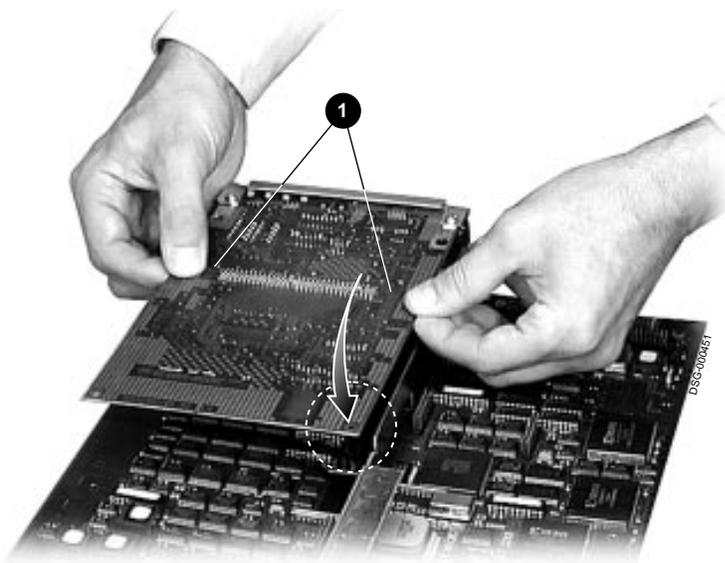

Copyright © Digital Equipment Corporation 1993. All Rights Reserved.

The following are trademarks of Digital Equipment Corporation: Ethernet, PrintServer, ThinWire, and the DIGITAL logo.

S2415