

48-port GbE fixed configuration  
1-RU switch

Up to four 10 GbE uplinks

Scalable stacking technology supports  
144 GbE ports in up to three S50Ns

### S-Series S50N High Performance GbE/10 GbE Access Switch

The Force10 S50N brings core-like resiliency in a compact form factor to the network edge, enabling cost-effective scalability. This high-density gigabit ethernet switch, with low switching latency, delivers the critical functionalities that advanced enterprise network edges demand.

#### Key Applications


Coupled with the E-Series, which delivers unmatched resiliency and performance, the S50N enables IT managers to deploy a reliable end-to-end 10 GbE solution that spans from core to network edge.

- Line-rate GbE and 10 GbE rack switches for the most demanding data center, storage or compute facility
- Cost effective distribution layer into a 10 GbE LAN core or distributed data center deployments

#### Key Features

The S50N is a fixed configuration switch that delivers the reliability and scalability that data centers demand.

- 48 10/100/1000 ports in a 1-RU form factor
  - 44 ports 10/100/1000 Base-T
  - 4 ports 10/100/1000 Base-T shared with SFP pluggable optics
- Optional Modules
  - 2-port 10 GbE LAN PHY (XFP pluggable optics)
  - 2-port 10 GbE (CX4)
  - 2-port 12 Gbps stacking
  - 1-port 24 Gbps stacking
- Switching fabric capacity of 288 Gbps and forwarding capacity of more than 131 Mpps
- Stack up to three S50Ns to deliver a scalable high capacity solution
- Supports Jumbo frames of up to 9,216 bytes; ideal for high-end server connectivity and network attached file servers
- Full complement of standards-based Layer 2 and Layer 3 features
- Built-in power redundancy

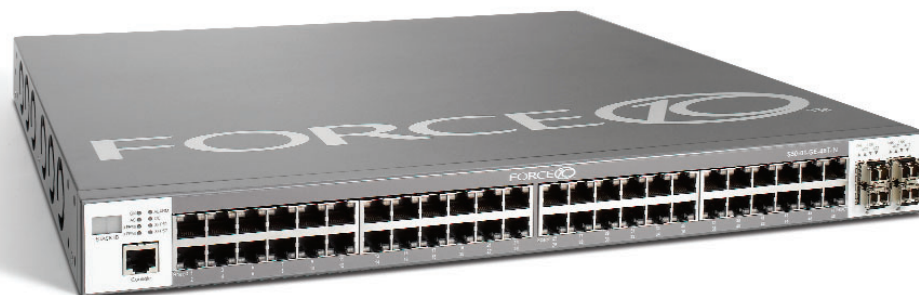

# Specifications: S-Series S50N Data Center Switch



## Ordering Information

ORDER NUMBER	DESCRIPTION
S50-01-GE-48T-AC	48 port 10/100/1000BaseT with four SFP ports, 2 modular slots and 1 AC + 1 DC power supply
S50-01-GE-48T-DC	48 Port 10/100/1000BaseT with four SFP ports, 2 modular slots, and 2 DC power supplies
S50-01-10GE-2P	2-port 10 GbE XFP Fiber Module*
S50-01-10GE-2C	2-port 10 GbE CX4 Module*
S50-01-12G-2S	2-port 12 Gbps Stacking Module*
S50-01-24G-1S	1-port 24 Gbps Stacking Module*
S50-01-SSC-12G	60cm stacking cable for S50-01-12G-2S
S50-01-LSC-12G	4m stacking cable for S50-01-12G-2S
S50-01-SSC-24G	60cm stacking cable for S50-01-24G-1S
S50-01-LSC-24G	4m stacking cable for S50-01-24G-1S
SA-01-PSU	Redundant Power Supply Unit Includes one cable
SA-01-EPS	Redundant Power Supply Shelf
S50-01-SW-L3	Layer 3 Software Upgrade

\* Optional module for the S50N

## Physical

48 line-rate ports 10/100/1000Base-T  
4 SFP ports (shared)

### Optional Modules:

- 2 line-rate ports 10 Gigabit Ethernet XFP
- 2 line-rate ports 10 Gigabit Ethernet CX4
- 2 line-rate ports 12 Gigabit Stacking
- 1 line-rate port 24 Gigabit Stacking

1 RJ-45 Console/management port with RS-232 signaling

Size: 17.32 w x 16.73 d x 1.73" h (440 x 425 x 44 mm)

Weight: 14.39 lbs (6.54 Kg)

Power Supply: Primary 100-240V AC, 50-60Hz, Autosensing  
Redundant -48V Terminal Type DC

Max. Thermal Output: 530 BTU/hr

Max. Current Draw per System:

4A 100/120 VAC, 2A 200/240 VAC

Max. Power Consumption: 150W

19" rack mountable

Standard 1U chassis height

Max. Operating Specifications:

Temperature: 32° to 122°F (0° to 50°C)

Operating humidity: 10 to 90% (RH), non-condensing

Max. Non-operating Specifications:

Storage Temperature: -40° to 158°F (-40° to 70°C)

Storage humidity: 10 to 90% (RH), non-condensing

Fan Acoustic Noise at Low, Medium, and High speed

S50N-AC: 39.3 dB, 49.2 dB, 59.6 dB

S50N-DC: 39.7 dB, 48.1 dB, 58.3 dB

Reliability: MTBF 169,315 hours

## Redundancy

Redundancy in stack connectivity (self healing ring)

Redundancy with up to 4 ports of 10 GbE uplinks

Redundancy with dual modular slots

Redundancy with GbE uplinks – using Link Aggregation

External Power Redundancy

## Performance

Layer 2 MAC Addresses: 16K  
Layer 3 Forwarding Entries: Up to 3k LPM table and 4k host entries  
Switching Fabric Capacity: 288 Gbps  
User Traffic Capacity: 176 Gbps (131 Mpps)  
Jumbo Frame Support: 9216 bytes  
Link Aggregation: 8 links per Link Aggregation Group and 48 groups per system  
Stacking Capacity: Up to 96 Gbps  
Queues per port: 8 Queues (8th queue reserved for stacking)  
VLANs: 1024 VLANs with 4096 tag value support

## IEEE Compliance

802.3 10Base-T  
802.3u Fast Ethernet (100Base-TX)  
802.3ab 1000Base-T  
802.3z Gigabit Ethernet (1000Base-X)  
802.3ae 10 Gigabit Ethernet  
802.3ak 10 Gigabit Ethernet CX4  
802.1p L2 Prioritization  
802.1Q VLAN Tagging  
802.1s Multiple Spanning Tree Protocol  
802.1w Rapid Spanning Tree Protocol  
802.1AB Link Layer Discovery Protocol  
802.3ad Link Aggregation with LACP  
802.1D Bridging  
802.3x Flow Control

## RFC Compliance

### OSPF:

1765	OSPF Database overflow	2154	OSPF MD5
1850	OSPF MIB	2328	OSPF v2

### RIP:

1058	RIP v1	2082	RIP MD5
1724	RIP MIB	2453	RIP v2

### IP Multicast:

1112 IGMP  
2236 IGMPv1 and v2  
3376 IGMPv3  
IETF-draft IGMP-snooping v1 and v2

### General Routing and Switching Protocols:

768	UDP	1256	ICMP
783	TFTP	1519	CIDR
791	IP	1542	BootP (relay)
792	ICMP	1812	IP v4 routers
793	TCP	1866	HTML
826	ARP	2068	HTTP
854	Telnet	2030	SNTP
894	IP over Ethernet	2131	BootP/DHCP helper
903	Reverse ARP		
951	BootP	2236	IGMP v1 & v2
1027	Proxy ARP	2338	VRRP

### Security:

1492 TACACS+  
2865 RADIUS  
3128 Protection Against a Variant of the Tiny Fragment Attack

### Port Security:

IETF-draft SSH v2, SSL, Layer 2/3/4 ACLs,  
IP Broadcast Control

## Quality of Service:

7 user queues per port  
IEEE 802.1p  
IP DiffServ support  
Per port rate limiting  
Per queue rate limiting  
Strict Priority and Weighted Round Robin Scheduling

## Management and SNMP:

RADIUS/TACACS+ Authentication  
Secure Web-based Management  
Industry familiar CLI: Scripting, Command completion, Context sensitive help

1157	SNMP v1
1212	Concise MIB Definition
1213	SNMP v2 (MIB-II)
1493	Bridge MIB
1643	Ethernet-like MIB
1901	Community based SNMPv2
1905	Protocol Operations for SNMPv2
1906	Transport Mappings for SNMPv2
1907	Management Information Base for SNMPv2
1908	Coexistence between SNMPv1 and SNMPv2
1724	RIP v2 MIB extension
1850	OSPF v2 MIB
2096	IP forwarding table MIB
2233	The Interfaces Group MIB using SMI v2
2570	SNMP v3
2665	Ethernet-like interfaces
2674	VLAN MIB
2787	VRRP MIB
2819	RMON (Groups 1,2,3,9)
2933	IGMP MIB

## Compliances

### Safety

UL 60950-1:2003, 1st edition  
CSA C22.2 No. 60950-1-03, 1st edition April 1, 2003  
CE Mark (EN 60950-1:2001)  
CB Report, all country deviations  
EN 60825-1 Safety of Laser Products-Part 1: Equipment Classification Requirements and User's Guide  
EN 60825-2 Safety of Laser Products-Part 2: Safety of Optical Fibre Communications Systems  
21 CFR 1040.10 and 1040.11 FDA laser device requirements

### EMC

USA: FCC CFR47 Part 15, Subpart J, Class A  
Canada: ICES-003, Issue-2, Class A  
Europe: EN55022 1998 (CISPR 22: 1997), Class A  
Japan: VCCI V3/01.4 Class A  
EN 61000-4-2 ESD  
EN 61000-4-3 Radiated Immunity  
EN 61000-4-4 EFT  
EN 61000-4-5 Surge  
EN 61000-4-6 Low Frequency Conducted Immunity  
EN 300 386 V1.3.1 (2001-09) EMC for Network Equipment  
EN 55024 1998

### Telecoms

JATE (for Japan)

### RoHS Compliance

All S50N components are EU RoHS compliant with the exception of lead, which is exempt from the directive for network equipment



Force10 Networks, Inc.

350 Holger Way  
San Jose, CA 95134 USA  
www.force10networks.com

408-571-3500 PHONE  
408-571-3550 FACSIMILE

© 2007 Force10 Networks, Inc. All rights reserved. Force10 Networks and E-Series are registered trademarks, and Force10, the Force10 logo, Reliable Business Networking, Force10 Reliable Networking, C-Series, P-Series, S-Series, EtherScale, TeraScale, FTOS, SFTOS, StarSupport and Hot Lock are trademarks of Force10 Networks, Inc. All other company names are trademarks of their respective holders. Information in this document is subject to change without notice. Certain features may not yet be generally available. Force10 Networks, Inc. assumes no responsibility for any errors that may appear in this document.

SSDS04

807 v1.7