
Overview

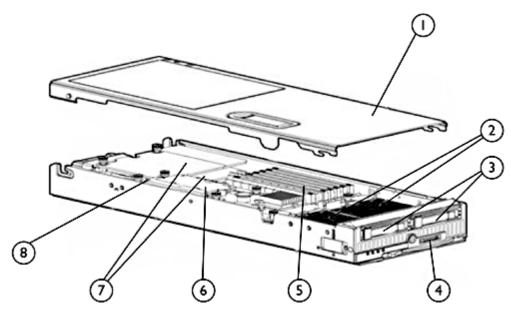

HP ProLiant BL460c Server Blade

- 1. Access Panel
- 2. Up to two Dual-Core Intel® Xeon® processors
- 3. Small form factor (SFF) hot-plug drive bays
- 4. Local I/O connector
- Eight (8) PC2-5300, Fully Buffered DIMMs (DDR2-667) Memory Slots
- 6. Smart Array E200i Controller (optional battery-backed write cache)
- 7. Two Mezzanine slots
- 8. Internal USB Connector

What's New

The BL460c offers dual core processors including the following:

- Dual-Core Intel® Xeon® Processor 5110 (1.6 GHz, 4M L2 Cache)
- Dual-Core Intel® Xeon® Processor 5140 (2.33 GHz, 4M L2 Cache)
- Dual-Core Intel® Xeon® Processor 5150 (2.66 GHz, 4M L2 Cache)
- Dual-Core Intel® Xeon® Processor 5160 (3.0 GHz, 4M L2 Cache)

The BL460c supports up to 32 GB of memory with the new 8 GB FBD PC2-5300 1x4GB Memory Kit.

Overview

At A Glance

This document covers the HP ProLiant BL460c server blade only. For more information on HP BladeSystems c-Class Infrastructure and HP BladeSystem c-Class Interconnect Components, please see the following QuickSpecs:

HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.HTML

and HP BladeSystem c-Class Interconnect Components QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12524 na/12524 na.HTML

The HP ProLiant BL460c provides greater 2P x86 server blade density without compromise and maximum power-efficiency with flexibility and choice.

HP ProLiant BL460c server blade includes:

• Processor:

- O Up to two Intel® Xeon ® 5000 and 5100 series Dual-Core processors
- O Supports up to 3.0 GHz 1333 MHz or 1066 MHz FSB; 4MB Level 2 cache memory
- O Intel 5000P chipset supporting up to a 1333 MHz Front Side Bus

Memory:

- O Up to 32 GB of memory, supported by (8) slots of PC2-5300 Fully Buffered DIMMs at 667 MHz
- O Supporting memory interleaving (2x1); memory mirroring and online spare capacity.

Storage Controller:

 Integrated Smart Array E200i RAID controller with 64 MB cache (with optional battery-backed write-cache with an upgrade to 128MB cache (BBWC)). Supports RAID 0,1.

• Internal Drive Support:

O Up to 2 small form factor (SFF) SAS or SATA hot plug hard disk drives

Network Controller:

- O Two (2) Embedded Dual NC373i Multifunction Gigabit Network Adapters
- One (1) additional 10/100 NIC dedicated to iLO 2 Management

Mezzanine Support:

- O Two (2) additional I/O expansion slots via mezzanine card.
- O Supports up to (2) mezzanine cards
 - Dual-Port Fibre Channel Mezzanine (4-Gb) options for SAN connectivity (Choice of Emulex or QLogic).
 - Ethernet NIC Mezzanine options for additional network ports
 - HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter
 - HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem
 - Infiniband (IB) and 10GbE planned for future support

• Internal USB Support:

One (1) internal USB 2.0 connector for security key devices and USB drive keys

• Form Factor:

O HP ProLiant BL460c server blade plugs vertically into the BladeSystem c7000 enclosure

Management:

 Integrated Lights-Out 2 (iLO 2) Standard Blade Edition (includes virtual KVM and graphical remote console at no additional cost)

Operating Systems:

O Supports Windows, Linux, and Netware Operating Systems

Enclosures:

O HP ProLiant BL460c server blade plugs vertically into the BladeSystem c7000 enclosure

Warranty:

O Protected by HP Services and a worldwide network of resellers and service providers. Three-year parts, 3 Year Labor and 3 Year on-site limited global warranty. Certain restrictions and exclusions apply. Pre-Failure Notification on processors, memory, and SAS hard drives. SATA hard drives have a one year warranty.



Standard Features (Server Blade)

Processor	Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 1333 MHz FSB)
	Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 1333 MHz FSB)

Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 1333 MHz FSB) Dual-core Intel Xeon Processor 5130 (2.00 GHz, 1333 MHz FSB)* Dual-core Intel Xeon Processor 5120 (1.86 GHz, 1066 MHz FSB)* Dual-Core Intel Xeon Processor 5110 (1.6 GHz, 1066 MHz FSB)

Dual-core Intel Xeon Processor 5063 (3.2 GHz, 1066 MHz FSB) Mid-Voltage

Dual-core Intel Xeon Processor 5050 (3.0 GHz, 667 MHz FSB)*

NOTE: Intel 5100 series processors are 64-bit, Dual-core, support Hyper Threading, and Intel VT.

NOTE: *Offered through CTO only

	NOTE: "Offer	red through CTO only.	
Upgradeability	Upgradeable	to 2 processors	
Cache Memory	2x2MB Level 2 cache memory (5000 Series) 1x4MB Level 2 cache memory (5100 Series)		
Chipset	Intel® 5000P	Chipset	
Memory	Туре	PC2-5300 Fully Buffered DIMMs at 677 MHz	
	Standard	1 GB (2 x 512 MB) 2 GB (2 x 1 GB)	
	Maximum	32 GB (8 x 4 GB) NOTE: Memory must be installed in pairs.	
Network Adapter	(2) Embedded single port NC373i Multifunction Gigabit Network Adapters with TCP,		
	One (1) addit	ional 10/100 NIC dedicated to iLO 2 Management	
Expansion Slots	Two Mezzanir	Two Mezzanine slots	
Integrated Manageability	Integrated Lig	hts-Out 2 (iLO 2) Standard Blade Edition (integrated on motherboard)	

Storage Controller Smart Array E200i 64MB memory module supports RAID 0,1

> Controller Available upgrades: 128MB with Battery-backed write cache

Maximum Internal Hot Plug Serial Attach 2 x 72GB Serial SCSI 144GB SAS Storage SCSI (SAS)

Hot Plug Serial ATA (SATA) 120GB SATA 2 x 60GB Serial ATA

Standard Features (Server Blade)

Graphics

Integrated ATI RN-50 1280 x 1024 x 16M color (32 MB DDR1 memory)

Graphics Resolution Supported Resolution Color Depths Depths 1280 x 1024, 16.7M, 64k, 256.16

1024 x 768, 16.7M, 64k, 256,16 800 x 600, 16,7M, 64k, 256, 16 640 x 480, 16,7M, 64k, 256, 16

Fibre Channel on the HP ProLiant BL460c server blade

Two optional Fibre Channel HBAs are supported by the HP ProLiant BL460c. Both mezzanine circuit boards connect directly to the server blade system board. These Fibre Channel HBAs are available via option kits and must be ordered separately.

Two option kits

Emulex LPe1105-HP 4Gb FC HBA for HP c-Class BladeSystem (403621-B21)

 Based on the same field-proven ASIC, firmware, and driver technology as Emulex's renowned LPe1150 HBA, the Emulex LPe1105-HP is fully driver compatible with all Emulex HBAs

QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem (403619-B21)

 Uses common drivers which means that customers can standardize on one QLogic driver whether they are using the QMH2462 or other 4Gb and 2Gb HBAs powered by QLogic

Emulex and QLogic Fibre Channel HBAs feature:

- Optimal performance utilizing PCI Express
- 4/2/1Gb/s auto negotiating speeds
- Dual-ports for redundant path connections
- Up to two FC HBAs per server blade providing redundant FC HBA support
- Optimized for HP StorageWorks and supported by third party SAN vendors
- Support for Microsoft® Windows® and Linux operating systems environments

Compatible SAN

HP ProLiant BL460c server blades are optimized for HP StorageWorks MSA, EVA and XP

HP ProLiant 460c server blades are compatible with select 3rd party SANs (please see blade storage page for more details: http://h18000.www1.hp.com/products/servers/proliant-bl/c-Class/storage.html

Standard Features

Insight Control Data Center Edition

Insight Control Data Center Edition delivers foundation management for HP BladeSystem lifecycles, including hardware resource deployment, health monitoring, software version control, performance monitoring, and vulnerability scanning and patch management.

Installs the following components by default using the wizard-based integrated installer:

- HP Systems Insight Manager
- Rapid Deployment Pack
- Performance Management Pack
- Vulnerability and Patch Management Pack

Additional ProLiant Essentials software and management tools included on the Insight Control Data Center Edition DVD can be installed manually.

- Virtualization Management Suite
- Workload Management Pack
- HP Open Service Event Manager
- HP Instant Support Enterprise Edition

NOTE: For Licensing and Packaging Options please see the options section of this QuickSpecs.

NOTE: Insight Control Data Center Edition is delivered with HP BladeSystem c-Class enclosures with either 16-server licenses or 8-server evaluation licenses (30-days). For additional information on HP c-Class Infrastructure please visit: HP BladeSystem c-Class Infrastructure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.HTML

NOTE: For additional product and licensing information about Insight Control Data Center Edition, HP Systems Insight Manager and Essentials software refer to http://www.hp.com/servers/proliantessentials.

Unified Foundation
Management and
Essentials Software Plug-
ins

HP Systems	Insight
Manager	

HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms.

ProLiant Essentials Rapid Deployment Pack

Rapid Deployment Pack (RDP) extends HP Systems Insight Manager with a complete deployment solution for HP ProLiant blade servers. RDP provides a central location to configure server hardware, deploy Windows, Linux and VMware ESX operating environments and install HP ProLiant Support Pack drivers using images and scripted profiles.

ProLiant Essentials Pack

ProLiant Essentials Performance Management Pack detects, analyzes, and Performance Management explains hardware bottlenecks on HP ProLiant servers, HP Integrity servers and shared storage.

The Vulnerability and Patch Management Pack The Vulnerability and Patch Management Pack integrates and simplifies the assessment and remediation of operating system vulnerabilities into HP Systems Insight Manager for Windows and Linux platforms.



Standard Features

Insight Management Agents The Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers.

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack

For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at

http://www.hp.com/servers/manage.

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change

notifications for ProLiant products. Sign up at http://www.hp.com/go/subscriberschoice

and customize your profile to receive various new alerts as they become

available, on a weekly or monthly basis.

ProLiant Support Packs and ROMPaq, software

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options, available through ProLiant Support Packs the ProLiant Essentials Rapid Deployment Pack, SmartStart or downloaded from

Software and Drivers download pages website at

http://www.hp.com/go/support.

Optional ProLiant Essentials Value Packs

Optional software offerings that selectively extend the functionality of an Adaptive Infrastructure to address specific business problems and needs:

- Accelerated iSCSI Pack enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and areatly improving the speed with which the requests are processed and sent to the network.
- Integrated Lights-Out Select Pack upgrades the Integrated Lights-Out processor with scripted and command line virtual media, Power Regulator reporting and enterprise security
- Intelligent Networking Pack detects and analyzes network bottlenecks or broken network linkages
 and steers traffic to the optimum route based on network conditions, plus it provides an extra layer
 of protection. The virus throttle feature of the solution slows the propagation of fast spreading
 virus.
- Server Migration Pack P2P Edition: Upgrading or replacing your existing server? Effortlessly transition to new servers with automated, accurate and affordable migration of OS, application and data.
- Virtualization Management Software Get the most out of server virtualization by unifying the
 management of physical and virtual servers in HP Systems Insight Manager. The Virtual Machine
 Management Pack plug-in provides central management and control of VMware and Microsoft
 virtual machines and provides physical host to virtual machine association. The Server Migration
 Pack plug-in automates the manual task of migrating servers between physical or virtual
 platforms.
- Workload Management Pack provides easier management of complex environments, improving overall server utilization and enabling Windows® 2000 customers for the first time to confidently deploy multiple applications on a single multiprocessor ProLiant Server.



Standard Features

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs, Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

SmartStart

SmartStart is a tool that simplifies single server setup, providing a rapid way to deploy reliable and consistent server configurations. SmartStart 7.50 and later can now deploy the HP ProLiant BL460c using the I/O port with an attached USB CD-ROM device. To obtain a copy of SmartStart for your blade server order or download your copy from the SmartStart web site. For more information, please visit the SmartStart Web site at http://www.hp.com/servers/smartstart.

OS Support

Microsoft Windows 2000 Server

Microsoft Windows 2000 Advanced Server

Microsoft Windows Server 2003, Standard Edition

Microsoft Windows Server 2003 R2, Standard Edition

Microsoft Windows Server 2003, Standard x64 Edition

Microsoft Windows Server 2003 R2, Standard x64 Edition

Microsoft Windows Server 2003, Web Edition

Microsoft Windows Server 2003 R2, Web Edition

Microsoft Windows Server 2003, Enterprise Edition

Microsoft Windows Server 2003 R2, Enterprise Edition

Microsoft Windows Server 2003, Enterprise x64 Edition

Microsoft Windows Server 2003 R2, Enterprise x64 Edition

Red Hat Enterprise Linux 3

Red Hat Enterprise Linux 4

SUSE LINUX Enterprise Server 9

SUSE LINUX Enterprise Server 10

Netware 6.5

NOTE: For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix at: http://www.hp.com/go/supportos.

NOTE: For an up-to-date listing of the latest drivers available for the ProLiant BL c-Class, please see:

http://www.compaq.com/support/files/server/us/index.html.

NOTE: For a more complete and up-to-date information on Linux support, please visit HP Linux website at: http://h18000.www1.hp.com/products/servers/linux/hpLinuxcert.html.

Supported Software **Options**

VMware Virtualization Software

Red Hat Enterprise Linux and management bundle for HP BladeSystems

NOTE: For more information on HP's Certified and Supported HP ProLiant Servers, please visit the

VMware Server Support Matrix at:

http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html

NOTE: For a more complete and up-to-date information on Linux for HP BladeSystems support, please

visit HP Linux website at:

http://h18000.www1.hp.com/products/quickspecs/12321 na/12321 na.HTML



Standard Features

Intelligent Manageability

Integrated Lights-Out 2 Standard Blade Edition (iLO 2)

Virtual KVM(Text and Graphical modes)

Virtual Media (CD ROM, floppy and USB flash drive) Virtual Power Button Control Integrated Remote Console Embedded system health Blade power consumption reading Browser, command line and scripted access

Dedicated LAN Connectivity

Automatic IP Configuration via DHCP/DNS/WINS

Industry Standard RC4, 128-bit Secure Sockets Layer (SSL) and Secure Shell (SSH) Security

IML and iLO Event Logging

Support for 12 user accounts with customizable access

Upgrade to HP ProLiant Essentials Integrated Lights-Out Select Pack

NOTE: Advanced features such as Graphical Remote Console and browser accessible Virtual

Floppy/CD-ROM are included with the BL c-Class server.

Availability

Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection

Two hot-plug SAS/SATA hard drive bays and integrated RAID (Smart Array E200i) controller on every

server blade (Battery-backed write cache is optional.)

Redundant ROM on each server blade

ECC Memory

Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load

balancing)

Security

Power-on password

Administrator's password

Integrated Lights-Out 2 has 12 customizable user accounts and SSL encryption

Integrated Lights-Out 2 can be disabled via a Global Setting

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to http://www.hp.com/go/factory-express.

Standard Features

RoHS Compliant

For Resellers in countries/regions with RoHS legislation (see NOTE) (e.g. EU, China, etc.) The use of the noted material in a solution and subsequent resale of that solution will result in the solution no longer meeting the requirements of RoHS legislation.

NOTE: Directive 2002/95/EC restricts the use of lead, mercury, cadmium, hexavalent chromium, PBBs and PBDEs in electronic products. Countries/regions outside the EU, eg. China, are introducing similar legislation. References to 'RoHS legislation' means requirements of Directive 2002/95/EC or to similar substance restriction legislation enacted by any country/region outside the EU.

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Blade Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. This warranty supports the HP ProLiant BL460c and BL480c Server Blades.

NOTE: Server Blade Enclosure Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support.

NOTE: Server Blade Interconnect Limited Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support.

Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical.

A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 hours, 5 day to 24 hours, 7 days call window with options including 4-hour response or 6-hour Call To Repair
- Comprehensive range of software technical support for Microsoft, Linux, ProLiant Essentials and VMware-based IT solutions helping to deliver high level of application availability. Response times range from 30 mins for critical problems to 2 hours.
- System Management, Performance Services and Mission Critical Support Solution

HP has introduced a new building block approach which allows customers to purchase the right coverage at the right time whether purchasing an initial server blade plus enclosure or purchasing additional ProLiant server blades over time. HP will offer two sets of Care Pack services, one designed to support the server blade and one designed to support the enclosure.

HP Care Pack services for HP ProLiant Server Blades cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

NOTE: HP Care Pack services for the c7000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP Supported Ethernet devices covered include the Ethernet Pass-Through Module, Fibre Channel Pass-Through Module, Cisco Catalyst 3020 Blade Swtich and GbE2c Ethernet Blade Switch.

NOTE: For more information regarding the Blade service portfolio visit our worldwide web site on the internet at: http://h20219.www2.hp.com/services/cache/81725-0-0-225-121.html

NOTE: For more information on HP Care Pack services, contact any of our worldwide sales offices or resellers or visit our worldwide Web site on the internet at: http://www.hp.com/hps/carepack





Standard Features

NOTE: For more complete information on HP Services offerings, customers and resellers, please visit us at: http://www.hp.com/hps

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html



Dual-core Model

HP ProLiant BL460c 5160 Processor(s)

DC 2G (1P) One of the following 416656-B21 depending on model

HP ProLiant BL460c 5150

DC 2G (1P) 416655-B21

Cache Memory

HP ProLiant BL460c 5140 Memory

DC 2GB (1P) One of the following depending on model

HP ProLiant BL460c 5110 Network Adapter

DC 1GB (1P)

416653-B21 Storage Controller

HP ProLiant BL460c 5063

DC, 2GB (1P) 404664-B21 Hard Drives

Internal Storage

Optical Drive

Form Factor

(1) Dual-core Intel Xeon 5160 Processor (3.00 GHz, 1333 FSB)

(1) Dual-core Intel Xeon 5150 Processor (2.66 GHz, 1333 FSB)

(1) Dual-core Intel Xeon 5140 Processor (2.33 GHz, 1333 FSB)

(1) Dual-core Intel Xeon 5110 Processor (1.6 GHz, 1066 FSB)

(1) Dual-core Intel Xeon 5063 Processor (3.2 GHz, MV, 1066 FSB)

2x2MB Level 2 cache memory (5000 Series) 1x4MB Level 2 cache memory (5100 Series) 8 GB (1 X 4 GB) PC2-5300, FBD DDR2-667

4 GB (2 X 2 GB) PC2-5300, FBD DDR2-667 2 GB (2 x 1 GB) PC2-5300, FBD DDR2-667 1 GB (2x512 MB) PC2-5300, FBD DDR2-667

(2) Embedded single port NC373i Multifunction Gigabit NICs plus (1)

additional 10/100 NIC dedicated to iLO 2 Management

Smart Array E200i Controller with 64MB (optional battery-backed write

cache)

None

No drives included; (2) SFF SAS/SATA drive bays

144GB SAS 120GB SATA

Up to 16 half-height blades supported in HP BladeSystem c7000 Enclosure



Configuration Information - Factory Integrated Models (North America only)

NOTE: For Configure to Order requirements within EMEA region, please consult local Sales Contact.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order server blades must start with a CTO Blade.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Server Blade Configuration (Select a configurable Blade)

Models HP ProLiant BL460c CTO Blade (North America) 404667-B21

Configurable Model ships with:

(2) Embedded single port NC373i Multifunction Gigabit NICs plus (1) additional

10/100 NIC dedicated to iLO 2 Management Integrated Smart Array E200i RAID controller

NOTE: Controller cache module selection is required. Select either the standard 64

MB module or the optional 128 MB module in step 2 below. Two small form factor (SFF) SAS/SATA hot plug hard drive bays

Integrated Lights-Out 2 Standard Blade Edition

Step 2: Choose Required Options (one of the following from each list unless otherwise noted):

noted):		
Processors	For single processor configuration choose:	
	Dual-Core Intel Xeon 5160 (3.0 GHz, 1333FSB) Processor Option Kit, FIO Base NOTE: If 2 processors are desired, select one 416660-L21and one 416660-B21.	416660-L21
	Dual-Core Intel Xeon 5150 (2.66 GHz 1333 FSB) Processor Option Kit, FIO Base NOTE: If 2 processors are desired, select one 416659-L21and one 416659-B21.	416659-L21
	Dual-Core Intel Xeon 5140 (2.33 GHz 1333 FSB) Processor Option Kit, FIO Base NOTE: If 2 processors are desired, select one 416658-L21 and one 416658-B21.	416658-L21
	Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 1333 MHz FSB) Processor Option Kit, FIO Base	419735-L21
	NOTE: If 2 processors are desired, select one 419735-L21and one 419735-B21.	
	Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 1066 MHz FSB) Processor Option Kit, FIO Base	419734-L21
	NOTE: If 2 processors are desired, select one 419734-L21and one 419734-B21.	
	Dual-Core Intel Xeon 5110 (1.6 GHz, 1066 FSB) Processor Option Kit, FIO Base NOTE: If 2 processors are desired, select one 416657-L21 and one 416657-B21.	416657-L21
	Dual-Core Intel Xeon 5063 (3.2 GHz MV, 1066 FSB) (Mid-Voltage) Processor Option Kit, FIO Base NOTE: If 2 processors are desired, select one 409598-L21 and one 409598-B21.	409598-L21
		100507.101
	Dual-Core Intel Xeon 5050 (3.0 GHz, 667 FSB) Processor Option Kit, FIO Base NOTE: If 2 processors are desired, select one 409597-L21 and one 409597-B21.	409597-L21
Memory	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
	NOTE IN A LOCAL DESIGNATION OF THE PROPERTY OF	



NOTE: Must be installed in pairs

351580-B21

406771-B21

QuickSpecs

Configuration Information - Factory Integrated Models (North America only)

Controller Cache 64 MB Cache - FIO Only 405102-B21

128 MB Battery-Backed Cache Enabler

NOTE: Supports the Smart Array E200i Controller, Smart Array 641 Controller, and

Smart Array 642 Controller.

Step 3: Choose Additional Factory Integratable Options

Fibre Channel Options Emulex LPe1105 FC Dual Channel 4Gb, PCI-E-to-Fibre Channel Host Bus Adapter 403621-B21

QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem 403619-B21

Communications HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter for c-Class 406770-B21

BladeSystem

HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem

NOTE: Supports HP c-Class BladeSystems.

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, including server blade enclosures interconnect options and power subsystem options; please see the following QuickSpecs:

HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517 na/12517 na.HTML

and HP BladeSystem c-Class Interconnect Components QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12524 na/12524 na.HTML.



Options

ProLiant Essentials Value Pack Software

ProLiant Essentials Accelerated iSCSI Pack, Single Server License	407484-1
NOTE: For additional ProLiant Accelerated iSCSI Pack License Kits- please see the QuickSpecs at:	
http://h18000.www1.hp.com/products/quickspecs/12466_na/12466_na.HTML	
ProLiant Essentials Integrated Lights-Out Select Pack	
ProLiant Essentials Integrated Lights-Out Select Pack, 1 server License	413119-
ProLiant Essentials Integrated Lights-Out Select Pack 8-server License	413122-
Featuring: sophisticated remote control and security features for HP BladeSystem servers and ProLiant ML/DL servers in text console environments. NOTE: For additional ProLiant Essentials Integrated Lights-Out Packs please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12362_na/12362_na.HTML	
ProLiant Essentials Intelligent Networking Pack Windows Edition and Linux Edition	
ProLiant Essentials Intelligent Networking Pack - Windows Edition, Single Server	372906-
icense NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.	
ProLiant Essentials Intelligent Networking Pack Linux Edition, Single Server License NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.	397004-
NOTE: For additional ProLiant Intelligent Networking Pack License Kits-Windows	
Edition please see the QuickSpecs at:	
http://h18000.www1.hp.com/products/quickspecs/12062_na/12062_na.HTML NOTE: For additional ProLiant Intelligent Networking Pack License Kits-Linux Edition blease see the QuickSpecs at:	
http://h18000.www1.hp.com/products/quickspecs/12327 na/12327 na.HTML	
ProLiant Essentials Server Migration Pack	
ProLiant Essentials Server Migration Pack, Single-Migration License NOTE: Contains one license, enabling 1 server migration, with a unique license activation key and documentation. NOTE: This license allows 1 server to be migrated from a physical server to a virtual machine. Or this license can be used to migrate a virtual machine from one virtualization layer i.e. VMware GSX to a different virtualization layer such as VMware ESX or Microsoft Virtual Server 2005.	375345-
NOTE: For additional ProLiant Server Migration Pack License Kits please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12328_na/12328_na.HTML	
ProLiant Essentials Server Migration Pack - Physical to ProLiant Edition	
,	410070
ProLiant Essentials Server Migration Pack - Physical to ProLiant Edition, Single- Migration License	412978-
NOTE: For additional ProLiant Server Migration Pack License Kits please see the QuickSpecs at:	
http://h18000.www1.hp.com/products/quickspecs/12467 na/12467 na.HTML	



372214-B21

QuickSpecs

Options

NOTE: For additional ProLiant Workload Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11452 na/11452 na.HTML

ProLiant Essentials Virtual Machine Management Pack

ProLiant Essentials Virtual Machine Management Pack, Single-Server License NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.

NOTE: For additional ProLiant Virtual Machine Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12328 na/12328 na.HTML

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: http://www.hp.com/servers/proliantessentials.

Processors	Dual-Core Intel Xeon 5160 (3.0 GHz MV, 1333 FSB) Processor Option Kit	416660-B21
	Dual-Core Intel Xeon 5150 (2.66GHz, 1333 FSB) Processor Option Kit	416659-B21
	Dual-Core Intel Xeon 5140 (2.33 GHz, 1333 FSB) Processor Option Kit	416658-B21
	Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 1333 FSB) Processor Option Kit	419735-B21
	Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 1066 FSB) Processor Option Kit	419734-B21
	Dual-Core Intel Xeon 5110 (1.6 GHz, 1066 FSB) Processor Option Kit	416657-B21
	Dual-Core Intel Xeon Processor 5063 (3.2 GHz MV, 1066 FSB) (Mid-Voltage)	409598-B21
	Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 667 FSB) Processor Option Kit	409597-B21
Memory	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
	NOTE: Must be installed in pairs.	



Options		
Hard Drives	Serial Attached SCSI (SAS) SFF Hot Plug	
	HP 36GB 3G SAS 10K SFF HDD	375859-B21
	HP 72GB 3G SAS 10K SFF HDD	375861-B21
	NOTE: SAS drives have a 3 year warranty. NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.HTML	
	SFF SATA Hot Plug	
	HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21
	NOTE: SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12091_na/12091_na.HTML	
Communications	HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter for c-Class BladeSystem	406770-B21
	HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem	406771-B21
HP ProLiant BL460c -	Emulex LPe1105 FC Dual Channel 4Gb, PCI-E-to-Fibre Channel Host Bus Adapter	403621-B21
Fibre Channel Adapter	QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem	403619-B21
	NOTE: Supports HP c-Class BladeSystems	
Tape Libraries	HP StorageWorks MSL2024 Tape Library	
	HP StorageWorks MSL2024 1 Ultrium 960 Drive Library	AG115A
	HP StorageWorks MSL2024 1 Ultrium 960 FC Drive Library	AG326A
	HP StorageWorks MSL2024 1 Ultrium 448 Drive Library	AG116A
	HP StorageWorks MSL2024 2 Ultrium 448 Drive Library	AG117A
	HP StorageWorks MSL4048 Tape Library	
	HP StorageWorks MSL4048 1 Ultrium 448 Drive Library	AG320A
	HP StorageWorks MSL4048 2 Ultrium 448 Drive Library	AG321A
	HP StorageWorks MSL4048 1 Ultrium 960 Drive Library	AG322A
	HP StorageWorks MSL4048 1 Ultrium 960 FC Drive Library	AG324A
	HP StorageWorks MSL4048 2 Ultrium 960 Drive Library	AG323A
	HP StorageWorks MSL4048 2 Ultrium 960 FC Drive Library	AG325A
	HP StorageWorks MSL6000 Tape Library	
	Ultrium 960 technology	
	HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library	AD606B
	HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library	AD608B
	HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library	AD607B
	HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library	AD609B
	HP StorageWorks MSL6060 2 Ultrium 960 Dr LVDS Library	AD610B
	HP StorageWorks MSL6060 2 Ultrium 960 Dr FC Library	AD611B



Options

	Ultrium 460 technology	
	HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library	AD598B
	HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library	AD600B
	HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library	AD599B
	HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library	AD601B
	HP StorageWorks MSL6060 2 Ultrium 460 Dr LVDS Library	AD603B
	HP StorageWorks MSL6060 2 Ultrium 460 Dr FC Library	AD604B
	NOTE: Please reference the MSL2024, MSL4048 and MSL6000 Tape Library QuickSpecs at http://www.hp.com/go/automation for additional information needed to create a complete solution; reference current compatibility information at http://www.hp.com/go/ebs HP StorageWorks Virtual Library Systems	
		AF728A
	HP StorageWorks 6105 Virtual Library System HP StorageWorks 6109 Virtual Library System	AG 167A
		AG 167A AF 729A
	HP StorageWorks 6510 Virtual Library System	
	HP StorageWorks 6518 Virtual Library System HP StorageWorks 6840 Virtual Library System	AG168A AG051A
	, .	AG169A
	HP StorageWorks 6870 Virtual Library System	AGTOYA
	NOTE: Please reference the VLS Tape Libraries QuickSpecs at http://www.hp.com/go/automation for additional information needed to create a complete solution. Reference current compatibility information at http://www.hp.com/go/ebs	
HP StorageWorks Modular Smart Array 1000	HP StorageWorks Modular Smart Array 1000 NOTE: Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at http://h18000.www1.hp.com/products/quickspecs/11033_na/11033_na.HTML	201723-B22
Cluster Options	NOTE: For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: http://www.hp.com/solutions/highavailability/oracle NOTE: For additional information regarding the HP ProLiant Cluster for HA/F500	
	please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10232 na/10232 na.html	
	ProLiant Cluster Starter Kit NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html	364023-B21
	HP HA/F200 for Entry SAN Cluster	364026-B22
	ProLiant Cluster HA/F500 for the Enterprise SAN NOTE: For additional information regarding the ProLiant Cluster HA/F500 for Enterprise SAN please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11933 na/11933 na.html	364024-B21
	HP Serviceguard for Linux, A.11.16 (single license version- Red Hat EL 3&4, SUSE SLES9)	307754-B26
	HP Serviceguard for Linux ProLiant Cluster, A.11.16 (2 license version - Red Hat EL 3&4, SUSE SLES9	305199-B26
	004, 3002 32237	



Options		
	HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription	T2798AA#001
	HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription	T2798AA#003
	NOTE: For additional information regarding the HP Serviceguard for Linux License, please see the following QuickSpecs at:	
	http://h18000.www1.hp.com/products/quickspecs/11518_na/11518_na.html	
USB Options	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	512MB HP DriveKey II	ED516AA
	USB 2.0 4-port Hub	DG954A
	2004 Standard Keyboard USB	DT528A#xxx
Rack Options for Rack	HP 10642 G2 Front Door ALL	AF009A
10000 G2 Series	HP 10636 G2 Front Door ALL	AF019A
	10642 G2 (42U) Side Panels (set of two) (Graphite Metallic)	AF054A
	10636 G2 (36U) Side Panels (set of two) (Graphite Metallic)	AF056A
	10636 G2 Rear Extension Kit	AF060A
	600mm G2 Stabilizer Option Kit (Graphite)	AF062A
	600mm G2, Heavy Duty Stabilizer Option Kit (Graphite)	AF064A
	800mm G2 Stabilizer Option Kit (Graphite)	AF066A
	800mm G2, Heavy Duty Stabilizer Option Kit (Graphite) NOTE: Supports 10000 G2 Series only.	AF068A
	HP 10000 G2 Rack Grounding Kit	AF074A
	600W 10K G2 Rack Tie Down	AF076A
	NOTE: For additional information regarding Rack Options, please see the following URL: http://www.hp.com/go/rackandpower .	
HP KVM Switch Options	HP BladeSystem Cat 5 KVM Interface Adapter	AF100A
·	NOTE: Cat5e cables are required to connect Interface Adapters to Consoles Switches. Cat52 cables can be found at the following URL: http://www.hp.com/go/kvm	
	NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm	
Service and Support Offerings (HP Care Pack Services)	NOTE: The HP Care Pack service part numbers below for ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.	
	Hardware Services On-site Service	
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	UE458E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE459E
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE460E
	Support Plus 24	



Options

Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	UE473E
NOTE: HP Care Pack services for the c7000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP Supported Ethernet devices covered include the Ethernet Pass-Through Module, Fibre Channel Pass-Through Module, Cisco Catalyst 3020 Blade Switch and GbE2c Ethernet Blade Switch.	
Hardware Services On-site Service	
Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic	UE477E
4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	UE478E
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE479E
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE480E
Hardware Installation, Electronic	U5988E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 12 Port SAN Switch & 4Gb, 12 Port SAN Switch Upgrade LTU.	
Hardware Services On-site Service	
Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic	UC007E
4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	UC008E
4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UC009E
6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UC023E
Hardware Installation, Electronic	U5988E
Transmit initialization, Electronic	U3700L
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch.	U3706L
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port	037661
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch.	UE436E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage,	
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic	UE436E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	UE436E UE437E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years,	UE436E UE437E UE438E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UE436E UE437E UE438E UE439E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic Hardware Installation, Electronic NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port	UE436E UE437E UE438E UE439E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic Hardware Installation, Electronic NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch Power Pack.	UE436E UE437E UE438E UE439E U5988E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic Hardware Installation, Electronic NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch Power Pack. Hardware Services On-site Service	UE436E UE437E UE438E UE439E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic Hardware Installation, Electronic NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch Power Pack. Hardware Services On-site Service Support Plus Onsite HW support, 8am-9pm, M-F, 4hr response and SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays,	UE436E UE437E UE438E UE439E U5988E
NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. Hardware Services On-site Service Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic Hardware Installation, Electronic NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch Power Pack. Hardware Services On-site Service Support Plus Onsite HW support, 8am-9pm, M-F, 4hr response and SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic	UE436E UE437E UE438E UE439E U5988E



Options

HP Installation & Startup Service for HP BladeSystem Infrastructure, Electronic NOTE: Provides for an integrated hardware and software implementation that includes remote service planning, onsite deployment of hardware and software, installation verification testing and customer orientation. Hardware deployment covers the installation of a single BladeSystem enclosure that include server blades (up to 16), Ethernet network interconnect, and power options. Software deployment covers the installation and configuration of HP BladeSystem Essential Insight Control Datacenter Edition which includes Systems Insight Manager (SIM), HP Rapid Deployment Pack (RDP), Vulnerability and Patch Management Pack (VPM) and Performance Management Pack (PMP) and deploy up to two editions of either Windows or Linux, using scripted operating system installation software.	UE602E
ProLiant BL c-Class Blade Server Hardware Installation, Electronic	UE493E
ProLiant BL c-Class Enclosure and Server Blade Hardware Installation, Electronic	UE494E
Provides for the Installation and Start-up of ProLiant Essentials Rapid Deployment Pack, Electronic NOTE: Provides installation on a Customer supplied server designated as a Deployment Server. Includes the deployment of a single server. This new server will be deployed using either one of the pre-configured scripts or an image. In addition, the service will provide for the capture and storage of the configuration of the newly deployed server and orientation on product usage. To be delivered during standard office ours, standard office days.	U5683E
Provides for the Installation and Start-up of Rapid Deployment Pack Implementation of Rapid Deployment Pack (Basic) (Electronic)	UA042E
HP ProLiant Essentials Vulnerability and Patch Management Pack Installation and Startup Service, Electronic NOTE: Service coverage: onsite installation of the Vulnerability and Patch Management (VPM) software on a customer designated server, configuration of the VPM software to acquire security patches, enabling the VPM software to scan up to five (5) systems, applying the security patches to the designated servers, generating a report from VPM that shows the vulnerability assessment results, and providing customer with an orientation to the software.	UC929E
Provides for the Installation and Start-up of System Insight Manager (Electronic)	UA041E
Provides for the Installation and Start-up of System Insight Manager Agents (Electronic)	UA040E
NOTE: For more information, customer/resellers can contact http://www.hp.com/hps/carepack/services/	
Software Operating Environment Care Packs	
Microsoft Software Operating Environment Software Telephone 9x5 - 3 incident (Electronic)	U8169E
Red Hat Software Operating Environment Software Telephone 9x5 - 10 incident (Electronic)	U3402E
SUSE Software Operating Environment Software Telephone 9x5 - 3 incident (Electronic)	U9615E
ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 3 incident (Electronic) ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, 3 incident (Electronic)	U8222E U8301E
ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 10 incident ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, 10 incident ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 25 incident ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, 25 incident	UE006E UE116E UE117E UE118E



Options

ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 50 incident	UE119E
ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year,50 incident	UE120E
ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, unlimited SW Tech Support	UE121E
ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, unlimited SW Tech Support	UE452E
ProLiant Essentials Operating Environment, - 5 Day, 9x5, 3 year, unlimited SW Tech Support	UE453E
ProLiant Essentials Operating Environment, - 5 Day, 24x7, 3 year, unlimited SW Tech Support	UE454E

NOTE: For more information, customer/resellers can contact http://www.hp.com/hps/carepack/services/



Memory

DIMM installation guidelines:

- 1. All DIMMs must be PC2-5300 Fully Buffered DIMMs running at 667 MHz.
- 2. Both DIMM slots in a memory bank must be populated.
- 3. Banks must be populated in sequential alphabetic order, starting with bank A.
- 4. Both DIMMs in a memory bank must be identical. Install identical DIMMs as pairs only, starting with DIMM socket 1, bank A.
- 5. Multiple advanced memory protection (AMP) modes are supported, based on FBDIMM population and RBSU selection. The server blade defaults to Advanced ECC

HP ProLiant BL460c Server Blade (1P Model)

Standard Memory

1024-MB (2 x 512 MB) or 2048 MB (2 x 1024 MB) (depending on model) of PC2-5300, FBD DDR2-667 ECC DIMMs

Standard Memory Plus Optional Memory

Up to 2560 MB or 26624 MB (depending on model) of PC2-5300, FBD DDR2-667 ECC DIMMs. Memory is available with the installation of optional PC2-5300, FBD DDR2-667 DIMM memory expansion kits.

Standard Memory Replaced with Optional Memory

Up to 32768-MB of Pc2-5300, FBD DDR2-667 ECC DIMMs. Memory is available with the removal of standard memory and the installation of optional PC2-5300, FBD DDR2-667 DIMM memory expansion kits.


Memory		Slot							
		1A	2C	3A	4C	5B	6D	7B	8D
Standard	1024 MB	512 MB	Empty	512 MB	Empty	Empty	Empty	Empty	Empty
Standard	2048 MB	1024 MB	Empty	1024 MB	Empty	Empty	Empty	Empty	Empty
Optional	25600 MB	512 MB	4096 MB	512 MB	4096 MB	4096 MB	4096 MB	4096 MB	4096 MB
Optional	26624 MB	1024 MB	4096 MB	1024 MB	4096 MB				
Maximum	32768 MB	4096 MB							

Following are memory options available from HP:

•	1GB FBD PC2-5300 2X512MB Kit	397409-B21
•	2GB FBD PC2-5300 2X1GB Kit	397411-B21
•	4GB FBD PC2-5300 2x2GB Kit	397413-B21
•	8GB FBD PC2-5300 2x4GB Kit	397415-B21



Storage



1-2 2 x SFF SAS or SATA Hot Plug Hard Drives

Hard Drives

SAS Hard Drive

Quantity Supported Supported Controller

36 GB 10,000 rpm SAS 2 1-2 Smart Array E200i Controller

72 GB 10,000 rpm SAS

Serial-ATA (SATA) Hard Drive

Quantity Supported Supported Controller

60 GB 5,400 rpm SATA 2 1-2 Smart Array E200i Controller

Position

Supported External

External Storage

Modular Smart Array 1000 Supported
Please see the
Modular Smart
Array 1000
QuickSpecs
below to
determine
configuration
requirements

Quantity

Host Controller or Adapter

Please see the Modular Smart Array 1000 QuickSpecs (URL below) for the latest list of supported HBAs

Please see the XP Disk Array Systems Quick Specs for the latest list

Modular Smart Array 1000:

http://h18000.www1.hp.com/products/quickspecs/11033 na/11033 na.HTML

HP StorageWorks 1500cs Modular Smart Array:

http://h18000.www1.hp.com/products/quickspecs/11945 na/11945 na.html

HP StorageWorks 1510i Modular Smart Array:

http://h18000.www1.hp.com/products/quickspecs/12230 na/12230 na.html

XP Disk Array Systems

Please see the XP External Disk Array

of supported HBAs

Systems
QuickSpecs
below to
determine

configuration requirements



Storage

HP StorageWorks XP10000 Disk Array:

http://h18006.www1.hp.com/products/storageworks/xp10000/index.html

Enterprise Virtual Array

Systems

Please see the XP External

Disk Array Systems QuickSpecs

below to determine configuration requirements Please see the XP Disk Array Systems Quick Specs for the latest list

of supported HBAs

HP StorageWorks Enterprise Virtual Array Family

http://h18006.www1.hp.com/products/quickspecs/12408 na/12408 na.html

Tape Libraries

NOTE: For complete listing of tape library compatibility see http://www.hp.com/go/ebs.

	Quantity Supported	Position Supported	Controller
HP StorageWorks Tape Libraries MSL2024 (Ultrium 448 and 960-based) MSL4048 (Ultrium 448 and 960-based) MSL6000 (Ultrium 960 and 460-based) MSL6000 (SDLT 600- based)	Please reference the relevant MSL or Tape Library QuickSpecs to determine configuration requirements	External	Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information.
HP StorageWorks Virtual Library Systems 6105 VLS 6109 VLS 6510 VLS 6518 VLS 6840 VLS 6870 VLS	Please reference the VLS QuickSpecs to determine configuration requirements	External	Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information.

Power Specifications

NOTE: To review maximum system power ratings for facilities planning purposes use the Active Answers Power Calculator which is available via the online tool located at URL: http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls



Technical Specifications

HP ProLiant BL460c Server Blade

Dimensions Height 2.207in (5.61cm)

Depth 20.058in (50.95cm) Width 7.154 in (18.17cm)

Weight Maximum 14.20 lb (6.44kg)

10°C to 35°C (50°F to 95°F) Temperature Range* Operating

> Non-Operating -40°C to 60°C (-40°F to 140°F) Storage -20°C to 60°C (-4 to 140°C)

Maximum Wet Bulb -30°C (86°F)

Temperature

10% to 90% Operating Shipping 10% to 90% 10% to 95% Storage

*NOTE: All temperature ratings shown are for sea level. An altitude derating of 1°C per 304.8 m (1.8°F per 1,000 ft) to 3048 m (10,000 ft) is applicable. No direct sunlight allowed. Upper operating limit is 3,048m (10,000 ft) or 70 Kpa/10.1 psia. Upper non-operating limit is 9,144 m (30,000 ft) or 30.3 KPa/4.4 psia.

**NOTE: Storage maximum humidity of 95% is based on a maximum temperature of 45°C (113°F). Altitude maximum for storage corresponds to a pressure minimum of 70 KPa.

Smart Array E200i Controller

Disk Drive and Enclosure 3G SAS (Serial Attached SCSI)

Interface 1.5G SATA (Serial Advanced Technology Attachment)

SAS Connectors 2 internal (SFF8484) x4 wide port connectors

Cache Memory Speed DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.

Server Interface x4 2.5G PCle provides 2GB/s maximum bandwidth. SAS Speed x8 3G SAS provides 2.4GB/s maximum bandwidth.

40-bit 64MB or 128MB cache: ECC protection, battery-backed, and Cache Memory

transportable

Logical Drives Supported Up to 32 logical volumes Maximum Logical Drive

Relative Humidity**

Capacity

144GB (2 x 72GB)

Host Memory Addressing 64-bit, supporting greater than 4GB server memory space

RAID Support RAID 5 (Distributed Data Guarding)

RAID 1+0 (Striping & Mirroring)

RAID 0 (Striping)

Upgradeable Firmware Upgradeable Firmware

Technical Specifications

Dual NC373m Multifunction Gigabit NICs Network Interface 1000Base-T

Compatibility IEEE 802.3ab 1000Base-T

Data Transfer Method PCI Express, four lanes (x4)

Network Transfer Rate

(Theoretical Maximum

Values)

Connector RJ-45 (via Interconnect switch or pass thru module)

Cable Support 1000 Base-TX Category 5 UTP up to 328 ft (100 m)

1000Base-TX (Full-Duplex) 2000 Mb/s

(via Interconnect switch or pass thru module)

Dual NC326m Multifunction Gigabit NICs Network Interface 1000Base-T

Compatibility IEEE 802.3ab 1000Base-T

Data Transfer Method PCI Express, four lanes (x4)

Network Transfer Rate 1000Base-TX (Full-Duplex) 2000 Mb/s

(Theoretical Maximum

Values)

Connector RJ-45 (via Interconnect switch or pass thru module)

Cable Support 1000 Base-TX Category 5 UTP up to 328 ft (100 m)

(via Interconnect switch or pass thru module)

© Copyright 2006 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.