

AC12™ Receiver



GPS, SBAS and Precision Carrier Phase Capability

Magellan, a world leader in GPS+SBAS technology, now offers the AC12™ OEM board with raw GPS carrier phase observables as a standard feature. Leveraging more than 15 years of OEM expertise in carrier phase technology, the AC12 is capable of precise carrier phase output while remaining cost effective. For high-precision applications constrained by cost and size, the AC12 board is the ultimate solution.

High-Accuracy Carrier Phase

The AC12 is a low-cost board with carrier phase measurements that deliver high-accuracy and flexibility usually found only in more expensive GPS boards. The AC12's extremely accurate carrier phase data can be used for navigation and provides an advantage in a variety of applications, enabling users to apply their choice of carrier smoothing algorithms to improve the pseudorange positioning accuracy and even perform carrier-phase differential positioning.

Innovative Satellite Tracking Technology

The AC12 supports differential remote operation and is capable of tracking Satellite Based Augmentation System (SBAS –WAAS/EGNOS/MSAS) satellites to enable enhanced and free-of-charge DGPS positioning. Next-generation board design minimizes the impact of common mobile application challenges such as skyward obstructions and GPS signal multipath, while superior signal reacquisition techniques ensure position availability and reliability.

Low-Cost Solution

For many applications, such as agriculture, GIS and mapping, the AC12 provides high-performance GPS at a fraction of the cost of “high-end” alternatives. A field-proven design built on Magellan's world-class GPS engineering capabilities, the AC12 OEM board is also ideal for land and marine navigation, low-cost heading and attitude systems, deformation monitoring, asset and people tracking, relative navigation, automotive, military, and even golf course management – delivering reliable, consistent position and raw data including carrier phase measurements under the toughest conditions.

AC12 Offers A Range of Additional Features!

- Low power consumption – only 0.23 watts
- User-defined and pre-defined datums
- Two-way serial port communications
- Raw data output (code and carrier)
- Precise carrier-phase tracking
- 1PPS output accurate to better than 250 nanoseconds
- Same form factor and interface as A12™ OEM board
- Also available in a rugged sensor or as a Development Kit

Features

- Low power consumption – only 0.23 watts
- User-defined and pre-defined datums
- Two-way serial port communications
- Raw data output (code and carrier)
- Precise carrier-phase tracking
- 1PPS output accurate to better than 250 nanoseconds
- Same form factor and interface as A12™ OEM board
- Also available in a rugged sensor or as a Development Kit

AC12 Receiver Technical Specifications

Standard Features

- 12-channel GPS receiver with up to 2 channels for SBAS
- L1 frequency, C/A code (SPS)
- DGPS (Remote)
- 1-Hz update rate
- 1 PPS (TTL)
 - Precision: 250 ns (Stand-alone)
- Single Port Operation
- 99 Predefined Datums
- User-defined datum Support
- WAAS/EGNOS Support
- Speed (max): 514 m/s (1,000 knots)
- Altitude (max): 18,288 m (60,000 ft)

Accuracy

Real Time Position¹

- Autonomous
 - Horizontal CEP 3.0 m (9.843 ft)
 - Horizontal 95% 5.0 m (16.48 ft)
- SBAS (WAAS/EGNOS/MSAS)
 - Horizontal CEP 1.0 m (3.28 ft)
 - Horizontal 95% 3.0 m (9.843 ft)
- DGPS
 - Horizontal CEP 0.8 m (2.62 ft)
 - Horizontal 95% 1.5 m (4.92 ft)
- Carrier Phase Measurement Accuracy 3 mm (RMS)

Acquisition Time²

- Typical Acquisition Time
 - Hot start <10 sec
 - Warm start <45 sec
 - Cold start <150 sec

Typical Reacquisition Time

- Total satellite blockage for < 20 seconds 1–2 sec
- Total satellite blockage for < 180 seconds 3–5 sec

Communication

- Standard NMEA-0183 V3.0 interface utilizing common Magellan OEM receiver command set
- Differential remote operation using RTCM V2.2 Message Types 1, 3 and 9.
- Software-selectable baud rate ranging from 1200 bps to 115K bps

AC12 OEM Board

- Operating Temp: –30°C to +80°C (–22°F to 176°F)
- Storage Temp: –40°C to +85°C (–40°F to 185°F)
- Humidity: 95% RH, non-condensing
- Vibration: 5-20 Hz 0.008 g²/Hz
20-100 Hz 0.05 g²/Hz
100-900 Hz 3 dB/octave
- Size (including shield case):
1.58 x 2.41 x 0.52 inches
40 x 61.2 x 13.3 mm
- Weight (including shield case): 1.6 oz. (45.4 gr)
- I/O Connector: 8-Pin Molex Connector
P/N 53254-0810
- RF Connector: Right Angle SMB
- Primary Voltage: 3.3 to 5.0 VDC
- Current Consumption: 55-70 mA
Power (typical): 230 to 250 mW @3.3 to 5.0 VDC
Back-up Voltage: 2.7-3.6 VDC = 6 µA
- I/O Ports
 - 1 full-duplex serial port (TTL compatible) for primary I/O
 - 1 half-duplex serial port (TTL compatible) for RTCM input


AC12 Sensor

- Operating Temp: –30°C to +70°C (–22°F to 158°F)
- Storage Temp: –40°C to +85°C (–40°F to 185°F)
- Size
4.38 x 4.12 x 1.16 inches
111.2 x 104.6 x 29.5 mm
- Weight: 8.5 oz. (240.0 gr)
- I/O Ports: 2 RS-232 Ports
- Input Voltage: 10-18 VDC
- Current Consumption: 70-90 mA
- Power Consumption: (typical) 1 watt

Development Kit

Kit Includes:

- PC compatible Evaluate and Mission Planning™ Software
- AC12 sensor: AC12 receiver in a rugged enclosure with 12 VDC power supply and RS-232 interface.
- Magnetic-mount antenna with cable
- Null modem cable and RS-232 interface cable with integral power connector
- Power source adapters (auto lighter adapter, AC adapter)

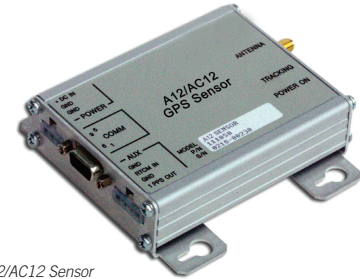

A12/AC12 Sensor

Mini Magnetic Mount Antenna

- 5V active micro patch antenna
- Dimensions: 46 x 39 x 12.5 mm
- Cable Length: 6 m
- Connector: SMB (board) or SMA (sensor)
- Gain: 24.5 dBi



Mini Magnetic Mount Antenna

¹ Position accuracies are based on tests calculated in low multipath environment under clear sky conditions. Accuracy may degrade in high multipath environments.

² Assumes that at least 4 GPS satellites are clearly visible.

Contact Information:

In USA +1 408 615 3970 ■ Fax +1 408 615 5200
Toll Free (Sales in USA/Canada) 1 800 922 2401
In South America +56 2 273 3214 ■ Fax +56 2 273 3187
Email professionalsales@magellangps.com
www.pro.magellanGPS.com