

DIGITAL

FCO

CATEGORY

PAGE 1

[I]

OF 12

FIELD CHANGE ORDER

NUMBER: CIBCI-I003

APPLICABILITY: When installing a 9XXX or 65XX system with a CIXCD or when upgrading an existing cluster with a CIXCD, replace ALL L0100 Rev "D" modules with L0118-\*\* or L0100 Rev "E" module (if available). This FCO affects all CI750, CI780, CIBCI and HSC50/70 nodes in VAXclusters containing a CIXCD.

\*\*NOTE\*\* An L0100 Rev E can co-exist with L0118s except in a greater than 16 node environment or when used with HSC60/90s.

PROBLEM & SYMPTOM: The CIXCD option requires an L0118 or an L0100 Min. Rev E. The L0100 Rev E cannot be used when the cluster is over 16 nodes or contains an HSC60/90.

SOLUTION: Replace all L0100 Rev D modules when installing CIXCD.

QUICK CHECK: Check that link module is part number L0118-\*\* or L0100 Min. Rev E.

PRE/CO-REQUISITE FCO:

MTTI HRS
1 Hr./Node

TOOL/TEST EQUIPMENT: See Page 2.

## FCO PARTS INFORMATION

FCO KIT NO.	DESCRIPTION OF CONTENTS	EQ KIT VARIATION APPLICABILITY
EQ-01616-XX FA-04949-XX	See Page 2 for description of contents and ordering information.	

## FCO CHARGING INFORMATION

WARRANTY/CONTRACT				NONWARRANTY/NONCONTRACT				
ON-SITE		OFF-SITE		ON-SITE		OFF-SITE		MATERIAL ONLY
TRAVEL/	EQ	INSTALL	EQ	TRAVEL/	EQ	INSTALL	EQ	ORDER-ADMIN, HANDLING
INSTAL	KIT	INSTAL	KIT	INSTAL	KIT	INSTAL	KIT	PKG, SHIPPING & EQ KIT
DEC	DEC	DEC	DEC	CUS	CUS	CUS	CUS	CUS

## APPROVALS

CSSE Tom Swett	CS LOGISTICS Ric Little	FS PRODUCT SAFETY Robert Brister
CSSE MANAGER Ric Grogan	This Document is published on multiple media including Hardcopy, Customer Services	FCO RELEASE DATE 30 May 1991
MICROMEDIA	Microfiche Libraries,	FCO REVISION



```

- - - - -
| d | i | g | i | t | a | l |
| - | - | - | - | - | - | - |

```

FCO CIBCI-I003

PAGE 3 OF 12

## OVERVIEW

-----

NOTE: If all nodes in the VAXcluster system have 10 tick capability (I.E., L0118, L0100 Rev "E" and/or CIBCA-AA and NO L0100 Rev "D"), then all nodes should be set to 10 tick mode regardless of the VAXcluster system size.

```

L0100 - Rev "E" - See step 7 for 7/10-TICK Switch setup.
L0118 - Rev "B" - See step 7 for 7/10-TICK, Cluster-size
                  Switch set-up, and Misc. Function Jumpers.
CIBCA-**- Add Jumper from E11 to E41 on VAXBI Backplane
           for "10-TICK INCOMPATIBLE" mode operation.
           Verify no jumpers D29-D59 and D30-D60 for cluster-
           size (NODE-COUNT) of 16 or less. Refer to
           CIBCA User Guide Pg. 2-10 to 2-13 for set-up.

```

## CI-LINK MODULE FCO INSTALLATION SUMMARY

```

*****
*          INCOMPATIBILITY WARNING - L0100-E1/E2 and L0118          *
*          -----                                                  *
*  The L0100-E1/E2 and L0118 "10-TICK-MODE" design changes are     *
*  *** INCOMPATIBLE *** with current L0100-D1 design, and CI/HSC-  *
*  LINK modules (L0100-E, CIBCA, L0118) set to "7-TICK-MODE".     *
*  Mixed "7 and 10-TICK-MODE" CI-LINK operation can have severe    *
*  impact on CI-arbitration performance and collision-rate (NO_RSP). *
*  For this reason, DEC does not support "10-TICK-MODE" CI-LINK    *
*  ROLLING-UPGRADES, thus requiring a CLUSTER SHUTDOWN to "ENABLE" *
*  10-TICK-MODE ** ONLY ** after all CI/HSC-nodes have been FCO'd. *
*                                                                      *
*  NOTE: High-availability customer exceptions to CLUSTER-        *
*  SHUTDOWN "rule" should be referred to CSSE for advice on       *
*  minimizing risks; but DEC will not assume any liabilities      *
*  for lost data/time with such CLUSTER upgrade programs.         *
*****

```

- o Forecast and obtain sufficient CI/HSCxx FCO kits for all CI7x0, CIBCI, HSCxx Cluster Nodes, ensuring availability of 1 (one) spare for every 10 (ten) FCO kits. FCO kits should NOT BE "P1 ORDERED", but should be ordered according to the Corporate Implementation Plan. CIxxx Functional Diags (EVGAA/B) from VAX Diag. Rel #31 are

also recommended for checkout.

\_	\_	\_	\_	\_	\_	\_	\_	\_
d	i	g	i	t	a	l		
\_	\_	\_	\_	\_	\_	\_	\_	\_

FCO CIBCI-I003

PAGE 4 OF 12

- o Study SWITCH/JUMPER SET-UP Procedures for L0100, L0118, and CIBCA modules for adjusting the following CI-LINK functions/modes:
  - "7/10-TICK" DELTA-TIME/QUIET-SLOT:
    - + L0118 Step 7
    - + L0100-E Step 7
    - + T1025/CIBCA-A Step 7 and CIBCA USER'S GUIDE Pg. 2-12
    - + T1046/CIBCA-B Step 7
  - CLUSTER-SIZE of 16/32 NODES:
    - + L0118 Step 7
    - + L0100-E NOT APPLICABLE
    - + T1025/CIBCA-A Step 7 and CIBCA USER'S GUIDE Pg. 2-12
    - + T1046/CIBCA-B Step 7
  - L0118 CI-LINK-MODE JUMPERS: Step 7
- o Install L0118 set to "7-TICK/COMPATIBLE-MODE" in all CI780, CI750, CIBCI, and HSC50/70 Cluster nodes. Refer to page 4 for CI780 specific upgrade procedures. There are no prerequisite/co-requisite CIxxx or HSCxx FCOs (modules or microcode) required for L0118 upgrade in "7-TICK 16-NODE MODE", but CI780.BIN Version V8.7 and CIBCA.BIN Version V7.5 are recommended.
- o Schedule and perform cluster shutdown after all non-CIBCA nodes are upgraded/FCO'd, and have been tested and verified to function in "7-TICK-MODE" operation under VMS. VMS system-testing is important to early detection and repair of any DOA FCO modules, prior to disrupting VAXcluster for CI-LINK 7-to-10-TICK mode-change.
 

```

      *****
      *           IMPORTANT NOTE   ===   IMPORTANT NOTE           *
      * Customer should be involved or perform all CLUSTER-      *
      * wide or node-specific VAX and HSC STARTUPS, BOOTS,      *
      * and SHUTDOWNS.                                           *
      *****
      
```
- o Switch all L0100-E, L0118-\*\*, T1015, and T1045s to "10-TICK-MODE" "INCOMPATIBLE" operation. Ensure all CIs and HSCs are powered-off before changing switches/jumpers. Refer to appropriate FCO steps. Any planned CI-NODE-ADDRESS changes should also be made at this time, with consideration of VMS SYSGEN and DECNET parameter changes required on reboot.
- o Reboot cluster, with customer consent, starting with HSCs.

CI-LINK MODULE FCO INSTALLATION PROCEDURE  
-----

1. Shutdown the system by executing the Shutdown Command Procedure, CUSTOMER SHOULD PERFORM THIS.

```
$ "@SYS$SYSTEM:SHUTDOWN.COM"
```



2. Control <CTRL> ) and HALT the system.
3. Power off the system by typing >>>POFF.
4. Open the rear doors of the CPU cabinet and the expander cabinet containing the CI (CIPA) box.
5. Set main power circuit breaker of the CPU cabinet to the OFF (0) position.
6. Set the 877 power controller main power circuit breaker of the expander cabinet containing CI (CIPA) box to the OFF (0) position.
7. Disconnect all four BNCIA cables for this VAX 8XX0 node at the SC008. Using the loopback attenuators connect:

```
Transmit Path "A" (TA) to Receive Path "A" (RA)  
Transmit Path "B" (TB) to Receive Path "B" (RB)
```

```
*****  
*                               C A U T I O N                               *  
*                               *                                           *  
*   The L0118 module, as all VAX modules do,                               *  
*   contains electrostatic discharge sensitive                             *  
*   devices (ESDS). The use of the VELOSTAT kit                             *  
*   is essential to prevent damage which may not                           *  
*   be noticed immediately.                                                 *  
*                                                                           *  
*****
```

8. Set up VELOSTAT KIT
  - a. Unfold the VELOSTAT mat to full size (24" x 24").
  - b. Attach the 15 foot ground cord to the VELOSTAT snap fastener on the mat.
  - c. Attach the alligator clip end of the ground cord to a good ground on the VAX 8X00 system.
  - d. Attach the wrist strap to either wrist and the



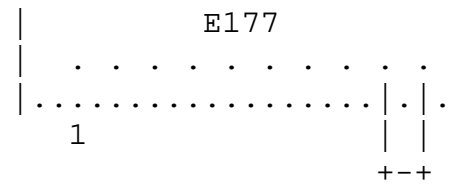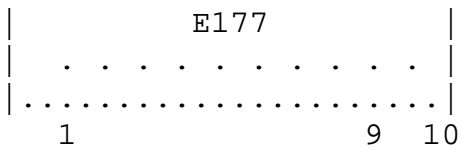

```

|_|_|_|_|_|_|_|_|_|_|
|d|i|g|i|t|a|l|
|_|_|_|_|_|_|_|_|_|_|

```

FCO CIBCI-I003

PAGE 7 OF 12

SET L0100-E2 SWITCH SETTINGS AS FOLLOWS:

-----

- o 7/10-TICK COMPAT. MODE SET BY DIP-SWITCH SW3-1 LOCATED AT TOP CENTER OF L0100-E2 TO RIGHT OF E118:

- "7-TICK COMPAT.,ECO OFF": SW3-1 SWITCH "OFF"
- "10-TICK INCOMPAT.,ECO ON ": SW3-1 SWITCH "ON" .

NOTE: SW3-2 IS NOT USED, BUT SET SAME AS SW3-1 TO AVOID CONFUSION.

- o NO CLUSTER-SIZE OR FUNCTION-MODE JUMPERS/SWITCHES.

- o L0100-E2 QUICK-CHECK (PART-REVISION VERIFY):

- SW3 DUAL-SWITCH-DIP-PACK AT TOP-CENTER, RIGHT OF E118.
- ETCH REV-D: P/N "50-14430-0-0 D1-P4" marking.

SET L0118 SWITCH/JUMPER SETTINGS AS FOLLOWS:

-----

```

*****
* NOTE: REFER TO L0118 FIGURES ON FCO PAGES 11      *
* AND 12 SW3 AND JUMPERS W1-W4 LOCATION.           *
*****

```

- o 7/10-TICK COMPAT. MODE SET BY DIP-SWITCH SW3-4 LOCATED AT TOP CENTER OF L0118 TO LEFT (BELOW IF VERTICAL) OF 2 CI-NODE-ADDRESS 8-SWITCH PACKS.

- "7- TICK COMPAT.,ECO OFF": SW3-4 SWITCH "OFF".
- "10-TICK INCOMPAT.,ECO ON" : SW3-4 SWITCH "ON" .
- SWITCHES SW3-2 AND SW3-3 MUST BE "OFF" (AFFECTS DELTA-TIME/QUIET-SLOT).

- o CLUSTER-SIZE FOR 16/32-NODE ADDRESSING AND ARBITRATION IS CONTROLLED BY SWITCH SW3-1. DEFAULT = 16-NODE-MODE = "OFF".

- 16-NODE MODE (DEFAULT WITH NO CISCE): SW3-1 "OFF".
- 32-NODE MODE (CISCE 24-NODE CLUSTER): SW3-1 "ON" .

- o L0118 FUNCTION-MODE JUMPERS W1-W4 DEFAULT SETTINGS CHECK:

View module with HANDLE-UP and FINGERS-DOWN.  
Refer to L0118 Figures on FCO pages 11 and 12.

- L0118-B1 HAS ECO-WIRES ON E83-3 and E150-1:

- = W1 located left of E2: plugged on left 2 stake-pins, marked with "box".
- = W3 located between E54 and E75: plugged on horizontal stake-pins, marked with "box".
- = W2 & W4 located as 4 stake pins below E24 and E62: W2 & W4 "OUT".

```

- - - - -
| | | | |
| d | i | g | i | t | a | l |
| - | - | - | - | - | - |

```

```

FCO    CIBCI-I003

PAGE  8  OF 12

```

- L0118-B2 HAS NO ECO-WIRES TO E83-3 AND E150-1:
  - = W1 located left of E2: W1 on left 2 stake-pins, marked with "box".
  - = W3 located between E54 and E75: W3 on horizontal stake-pins, marked with "box".
  - = W2 located below junction of E24 and E62: W2 on left 2 stake-pins marked with "box".
  - = W4 located below E24: W4 plugged on left 2 stake-pins marked with "box".

SET CIBCA BACKPLANE JUMPER SETTINGS AS FOLLOWS:(FOR QUICK REFERENCE)

-----

Refer to CIBCA Users Guide Pg. 2-10 to 2-13  
 All jumpers are located behind T1015 Module.  
 Jumper changes DO NOT take effect until SELF-TEST EXECUTED.

- o "7/10-TICK ALTER-DELTA-TIME" CONTROLLED BY JUMPER ON T1015 BACKPLANE PINS E11-E41, E09-E39, and E10-E40:
  - ENSURE E09-E39 and E10-E40 JUMPERS "OUT".
  - "7 -TICK COMPAT., ECO-OFF": Jumper OUT E11-E41.
  - "10-TICK INCOMPAT.,ECO-ON" : Jumper IN E11-E41.
- o CLUSTER-SIZE FOR 16/32-NODE ADDRESSING AND ARBITRATION IS SET BY JUMPER ON T1015 PINS D30-D60 and D29-D59:
  - Ensure E29-E59 out for both 16 or 32-NODE mode.
  - 16-NODE mode (default no CISCE): D30-D60 "OUT".
  - 32-NODE mode (CISCE 24-NODE ): D30-D60 "IN" .

11. Set main power circuit breaker of the CPU cabinet to the ON (1) position.
12. Set the 877 power controller main power circuit breaker of the expander cabinet containing CI (CIPA) box to the ON (1) position.
13. Close the rear doors of the CPU cabinet and the expander cabinet containing the CI (CIPA) box.
14. Power on the system by typing >>>PON.





21. Report the FCO activity on the LARS form in the "module/fail/area/FCO" column as "FCO CIBCI-I003" as indicated.

22. Update Site Management Guide.

```
  _ _ _ _ _  
 |d|i|g|i|t|a|l|  
 | _ _ _ _ _ |
```

```
FCO  CIBCI-I003  
  
PAGE 10  OF 12
```

LARS  
-----

	USA	GIA	EUROPE
Activity -			
Contract and Warranty	W	U	Y
Non Contract/Non Warranty	F	F	F
DEC Option	CIBCI	CIBCI	CIBCI
Type of Call	M	M	M
Action Taken	D	D	I
Fail Area-Module-FCO-Comments	CIBCI-I003	CIBCI-I003	CIBCI-I003
Material Used	EQ-01616-01	EQ-01616-01	EQ-01616-01
	EQ-01616-02	EQ-01616-02	EQ-01616-02

```
  _ _ _ _ _  
 |d|i|g|i|t|a|l|  
 | _ _ _ _ _ |
```

```
FCO  CIBCI-I003  
  
PAGE 11  OF 12
```

FIGURE 1 - L0118 LINK MODULE SWITCHES

```
  _ _ _ _ _  
 |d|i|g|i|t|a|l|  
 | _ _ _ _ _ |
```

```
FCO  CIBCI-I003  
  
PAGE 12  OF 12
```

FIGURE 2 - L0118 LINK MODULE SETTINGS

\\CIBCI  
\\65XX  
\\9XXX  
\\CIXCD  
\\1991  
\\MAY