

Getting Started with Open AT® V4.01

Revision: 003
Date: August 2006

wavecom
Make it wireless

Operating Systems | Integrated Development Environments | Plug-Ins | Wireless CPUs | Services

Getting Started with Open AT® V4.01

Revision: **003**

Date: **August 17, 2006**

Reference: **WM_DEV_OAT_UGD_008**

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

Trademarks

®, WAVECOM®, WISMO®, Open AT® and certain other trademarks and logos appearing on this document, are filed or registered trademarks of Wavecom S.A. in France or in other countries. All other company and/or product names mentioned may be filed or registered trademarks of their respective owners.

Copyright

This manual is copyrighted by WAVECOM with all rights reserved. No part of this manual may be reproduced in any form without the prior written permission of WAVECOM.
No patent liability is assumed with respect to the use of the information contained herein.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

Document History

Index	Date	Versions	
001	January 17, 2006	Creation	
002	March 31, 2006	Update	
003	August 17, 2006	Update for V4.01	

Confidential ©
This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

Table of Contents

1. Introduction 6

1.1. About this document 6
1.2. Open AT® SDK Documentation 6

2. Software installation 7

2.1. System Requirements 7
2.2. Hardware Requirements 7
2.3. Software Requirements 7

3. Installing the Open AT® SDK 8

3.1. License agreement 9
3.2. SDK contents 10
3.3. Setup options 11
3.4. Destination of the Program and Documentation Files 12
3.5. Tools path 13
3.6. Cygwin setup 14
3.7. File copy and system update 20
3.8. Installed shortcuts in the Start Menu 21
3.9. Wavecom Development Toolkit 21
3.10. ARM Compiler 21
3.11. Cygwin bash shell settings 22
3.12. Environment variables setup 22

4. Support 23

4.1. Contact Us 23
4.2. Online Support 23
4.3. Open AT® Developers Forum 23
4.4. Wavecom University 23
4.5. Open AT® Application Gallery 23
4.6. GCC compiler support 24

5. Warranty 24

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

List of Figures

Figure 1 - Open AT® startup screen 8
Figure 2 - Open AT® setup 9
Figure 3 – Click-wrap license agreement 9
Figure 4 – SDK contents 10
Figure 5 – Setup options 11
Figure 6 – Already installed component 12
Figure 7 – Open AT® Destination Folder 12
Figure 8 – Tools path 13
Figure 9 – Warning about the package selection window 14
Figure 10 – Cygwin setup 14
Figure 11 – Install from Local Directory 15
Figure 12 – Install root directory 16
Figure 13 – Local package directory 17
Figure 14 – Package selection window 18
Figure 15 – All packages are selected 18
Figure 16 – Cygwin setup is running 19
Figure 17 – Cygwin icons options 19
Figure 18 – Cygwin setup is done 20
Figure 19 - Open AT® SDK files copy 20
Figure 20 – Setup is completed 20
Figure 21 – Open AT® shortcuts 21

Confidential ©
This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

1. Introduction

1.1. About this document

This document describes how to quickly start with the Open AT® Software Development Kit.

1.2. Open AT® SDK Documentation

The following documents are included in the Open AT® SDK:

Document	Description
Getting Started with Open AT®	Description of the first steps to use Open AT®.
Tutorial	Tutorial for the development of Open AT® applications.
ADL User Guide for Open AT® V4.01	Guide for the development of Open AT® application with the Development Layer (ADL).
Basic Development Guide Open AT® V4.01	Guide for the development of Open AT® basic applications. This document includes the description of the Open AT® basic APIs.
Tools Manual	Manual describing the tools available in the Open AT® SDK.
AT command Interface Guide	Description of the AT commands supported in the Open AT® OS.
Open AT® Customer Release Note	Release note listing the Open AT® design features as well as the new features.

NOTE: All reference manuals are provides in PDF format. The Adobe® Acrobat Reader® can be downloaded from Adobe's web site at **http:\\www.adobe.com**. The recommended version is Version 5.0 or higher.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

2. Software installation

To develop and test Open AT® applications you must install the Open AT® SDK. This chapter guides you through the installation of the Open AT® SDK.

2.1. System Requirements

To install the Open AT® SDK, your system must support one of the following operating systems:

- Windows 98 / NT / Me / 2000 / XP

IMPORTANT WARNING: The provided GCC compiler runs only on Windows NT/2000/XP versions (it is not supported on Windows 98/ME systems).

2.2. Hardware Requirements

The main requirements for the PC that will support the Open AT® SDK are:

- Pentium 300 MHz or higher with at least 128 MB of RAM and 500 MB free on the hard disk
  (Recommended: CPU speed 1GHz or higher, RAM: 256 MBytes or more)
- A CD-ROM drive (for software installation)
- At least 1 free COM (serial) port for the communication with the target product

2.3. Software Requirements

- Microsoft Visual C++ Version 6.0
  or
  Microsoft Visual C++ .NET 2002 edition (7.0)
  or
  Microsoft Visual C++ .NET 2003 edition (7.1)
- ARM Compiler (optional)

Open AT® applications may be built for target mode or remote mode. The Visual C++ environments are required for the remote mode and may be used also to build projects in target mode.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3. Installing the Open AT® SDK

Insert the Open AT® SDK CD-ROM in the drive on your PC. If the auto-start is enabled, the installation will automatically start.
If the auto-start is disabled or for some reason the auto-installation does not start, you can use Windows Explorer to launch **\autorun\autorun.exe** from the root folder of the CD-ROM.
After this, the following menu is displayed.



Figure 1 - Open AT® startup screen

Several operations are possible from this menu:

- Display the Readme.html file,
  which describes the CD-ROM contents.
- Install the Open AT® SDK.
- Install the Development Toolkit
- Display documentation HTML file,
  which allows to access to all documents related to Open AT®.
- Explore the CD-ROM contents.
- Exit the Open AT® installation program.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

To install the Open AT® SDK, choose **install Open AT®**. The setup program will then run.

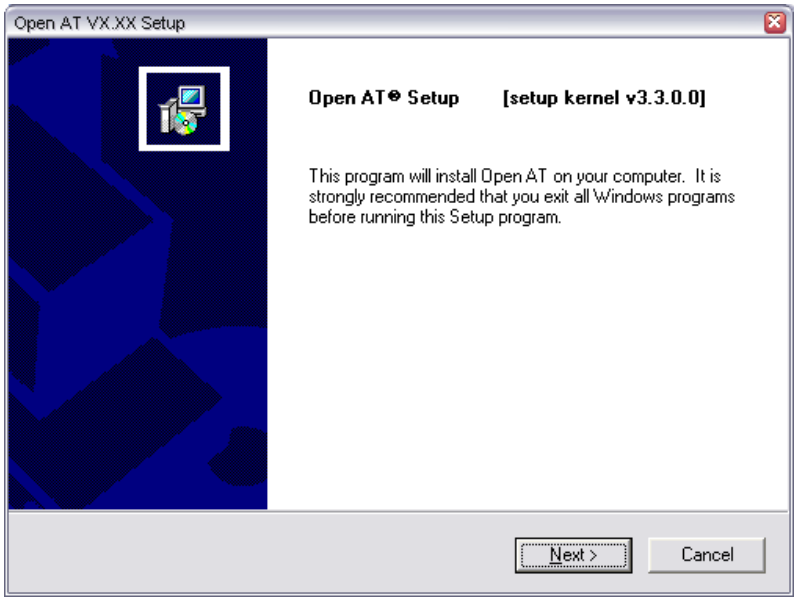


Figure 2 - Open AT® setup

Select **Next** to continue

3.1. License agreement

The Open AT® click-wrap license agreement is now displayed. You have to read & accept this license agreement (by selecting the **Yes** button) in order to continue running the Open AT® setup process.

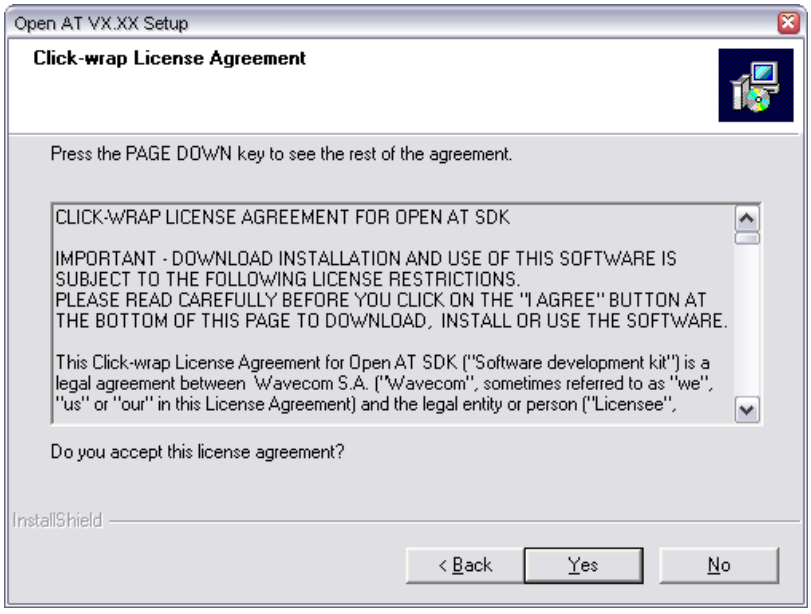


Figure 3 – Click-wrap license agreement

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3.2. SDK contents

Then an SDK contents summary is displayed, including:

- the ADL library version
- the included add-on libraries (TCPIP, DTL, GRL, etc...) versions
- the generation tools components versions

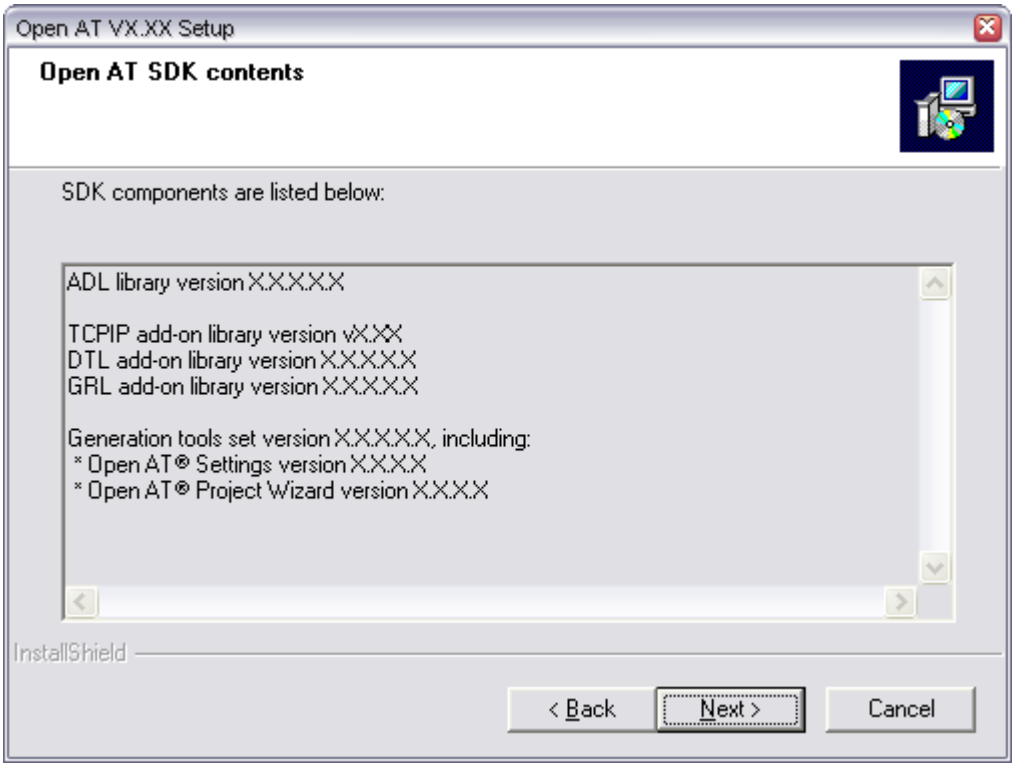


Figure 4 – SDK contents

Select **Next** to continue

wavecom Confidential ©
This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3.3. Setup options

Some components can be installed either together or separately. The available components are:

- Open AT® SDK, with ADL & add-on libraries, related header files and the documentation in PDF format, samples & generation tools; Open AT® application samples, with sources, built binaries and HTML documentation;
- Wavecom Software Generation Toolkit, used to build Open AT® applications in target mode;
- Cygwin: this tool is a Linux environment running under Windows. The provided version on the SDK is the 1.5.10 one; it is recommended to use this version since SGT and provided GCC compiler are designed to run with.
- GCC Cross-Compiler: to build Open AT® target applications. The provided version is correctly running on Cygwin 1.5.10 version (based on Windows NT / 2000 / XP systems).

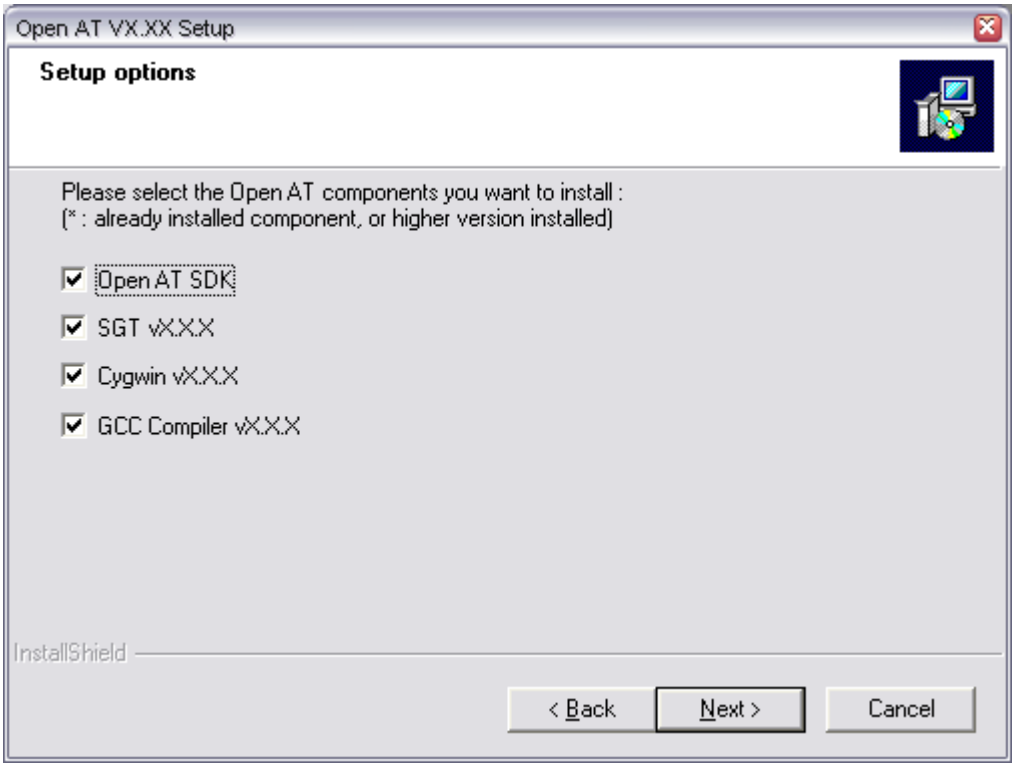


Figure 5 – Setup options

The Setup program is able to detect already installed components. For such components, the corresponding check box will be disabled, and the * tag will be displayed.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.



Figure 6 – Already installed component

After the choice of the setup options, select **Next** to continue.

3.4. Destination of the Program and Documentation Files

The Open AT® SDK can be installed in any directory on your hard disk.

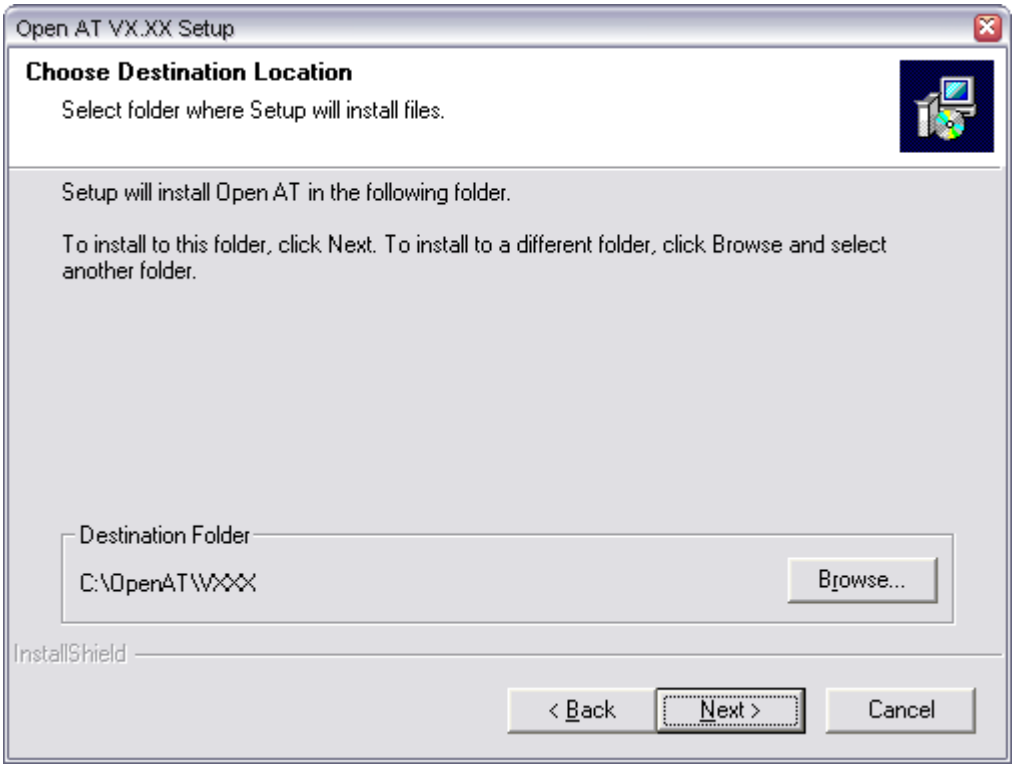


Figure 7 – Open AT® Destination Folder

The default location, as shown in the example above, is in a folder named with the version number of the Open AT® SDK. By default, it is installed under the root folder of the **C:** drive. If this location is not suitable, enter a different path before clicking **Next**. The files will be copied under the specified destination folder.

Warning: this path must not include any space character.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3.5. Tools path

Since Open AT® tools (as SGT, or GCC compiler) are independent of the Open AT® SDK release, they will be installed in a specific folder. If GCC or SGT options are selected, the setup will require this path to configure the WMTOOLS environment variable, where Open AT® tools are or will be installed.

Select another folder if the default one is not suitable, and click Next.

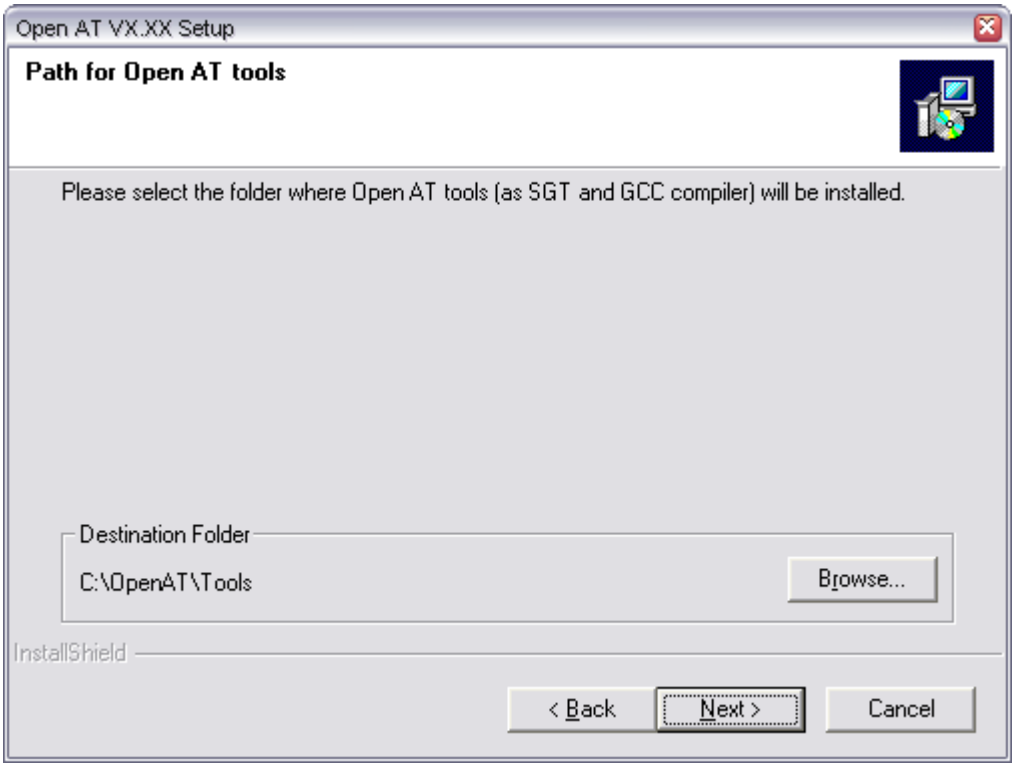


Figure 8 – Tools path

Warning: this path must not include any space character.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3.6. Cygwin setup

If the Cygwin component is selected, the Cygwin setup is launched during the file copy.
Firstly, a message box informs that **all** the provided packages have to be installed.



Figure 9 – Warning about the package selection window

- On Cygwin setup welcome screen, click Next;

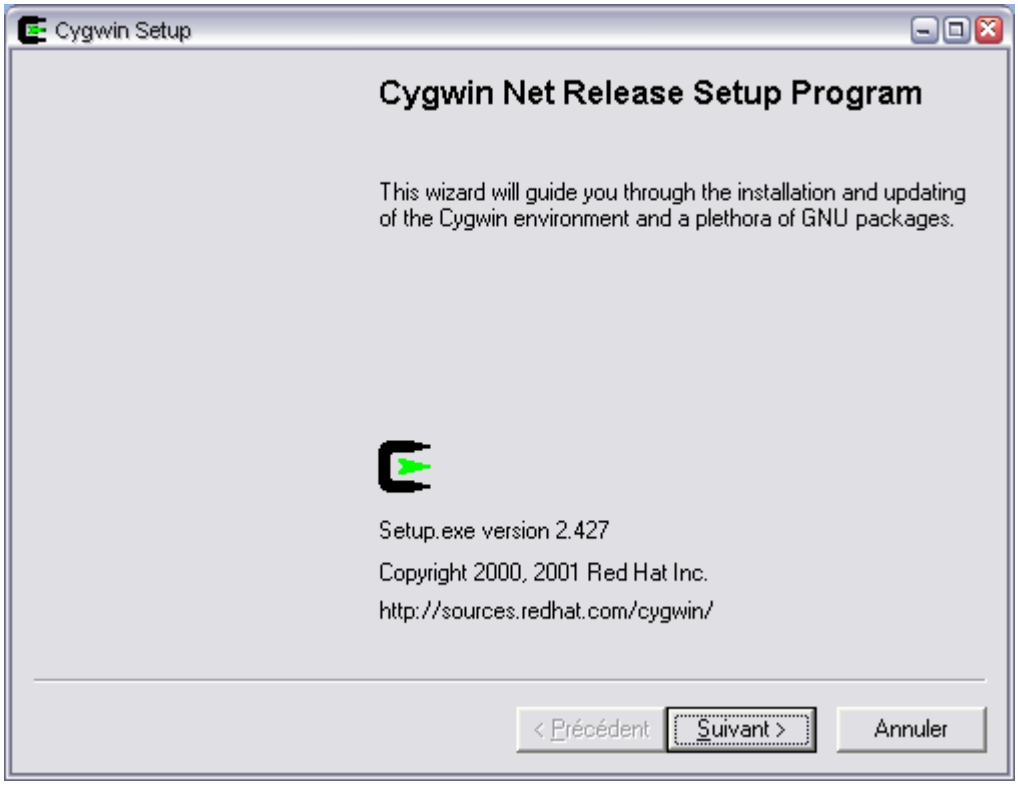


Figure 10 – Cygwin setup

Confidential ©
This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

- Select the “Install from Local Directory” option, and click Next;

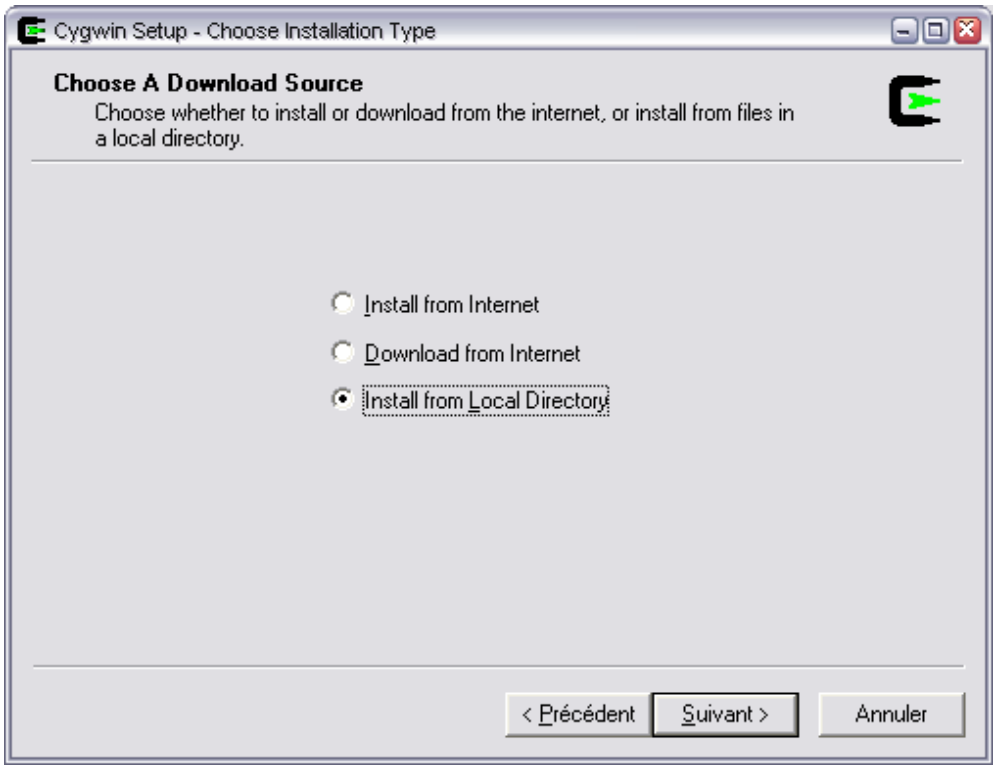


Figure 11 – Install from Local Directory

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

- Select the directory where you want to install Cygwin and click Next;

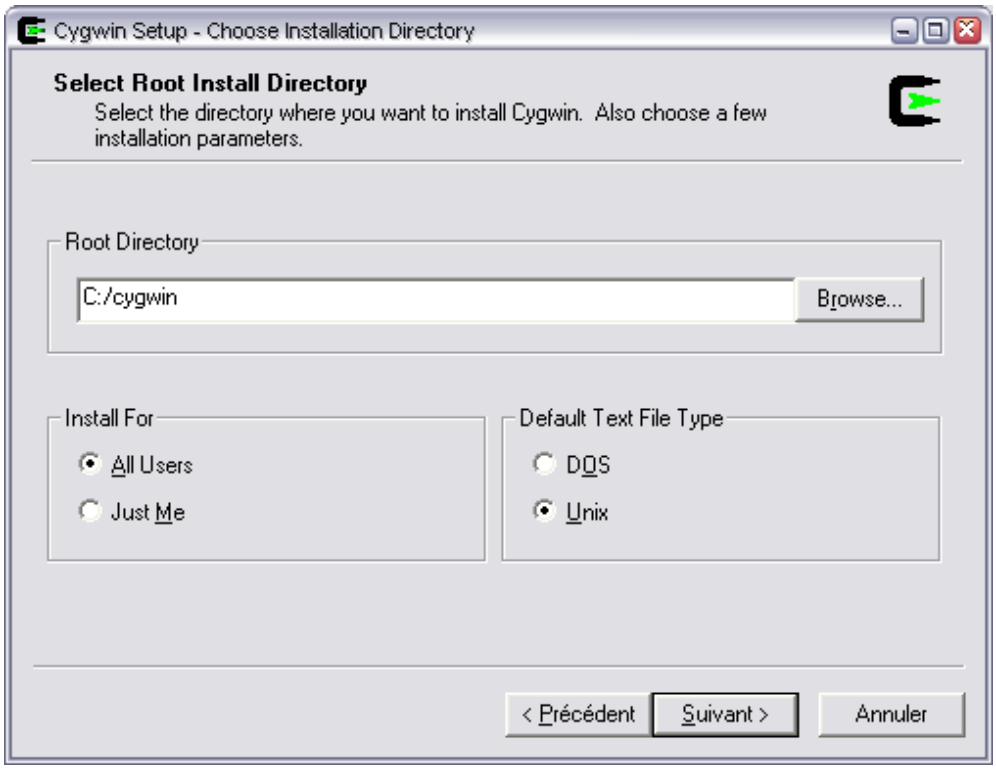


Figure 12 – Install root directory

Confidential ©
This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

- Check your cdrom drive \Software\Cygwin sub-directory is well selected, and click Next;

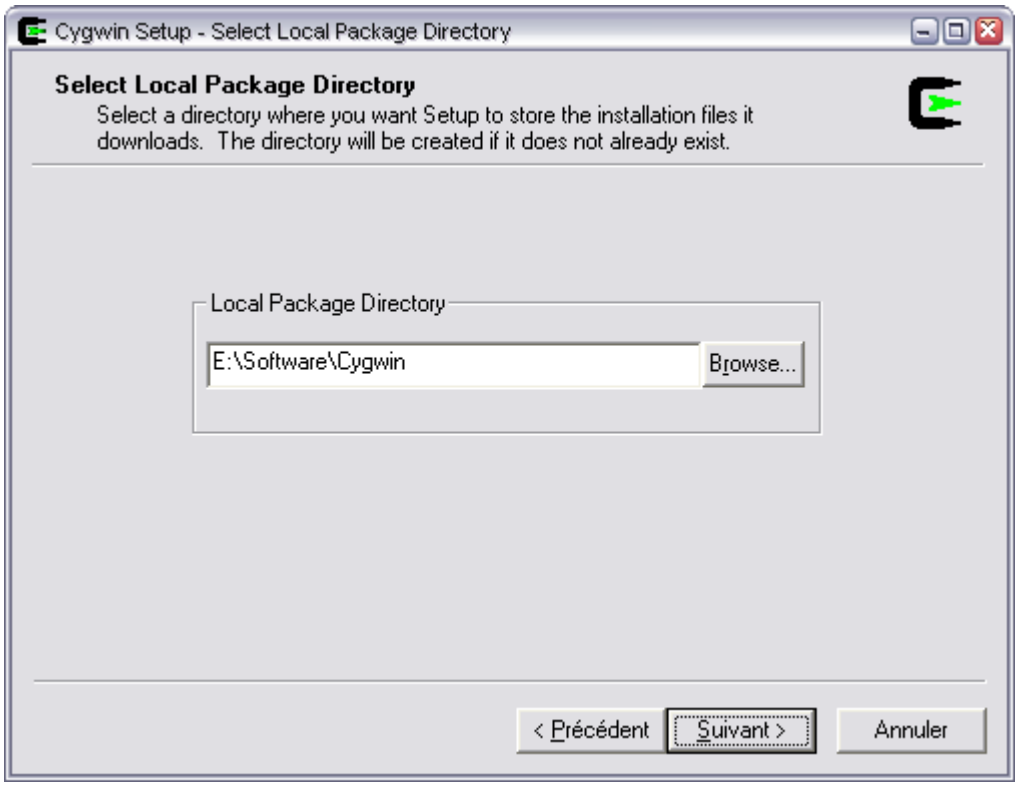


Figure 13 – Local package directory

- Please wait while Cygwin setup is reckoning checksums on provided packages;

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

- The Package selection window is then displayed

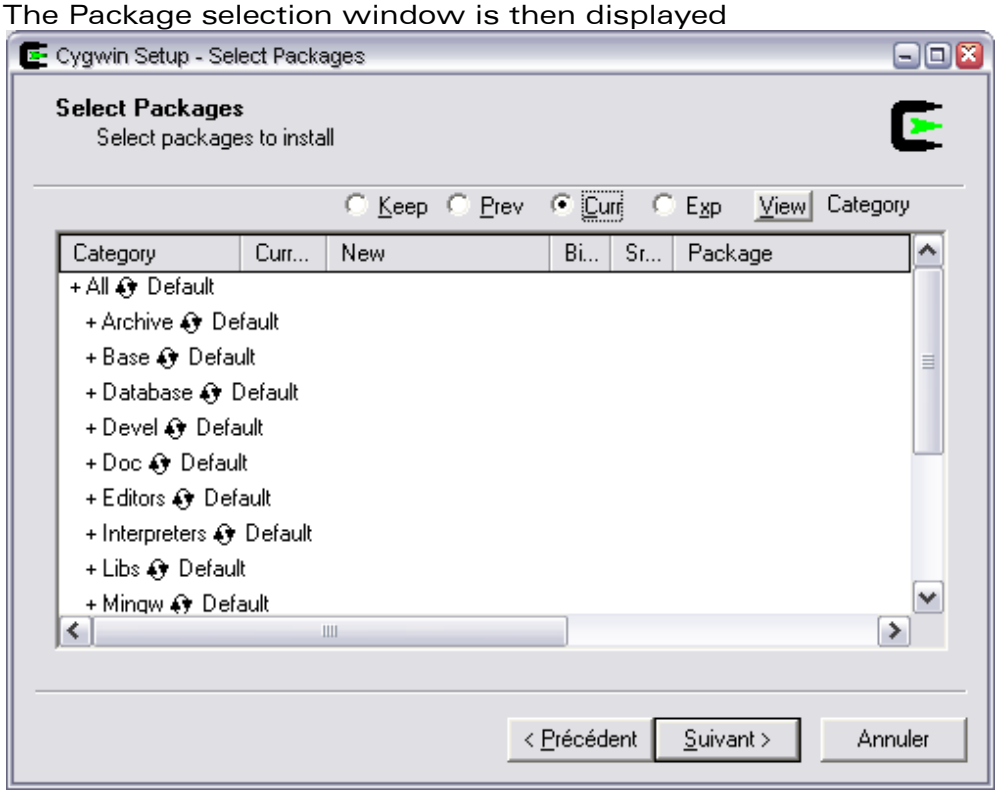


Figure 14 – Package selection window

- Then click the icon behind the "All" package title, to select and install all packages

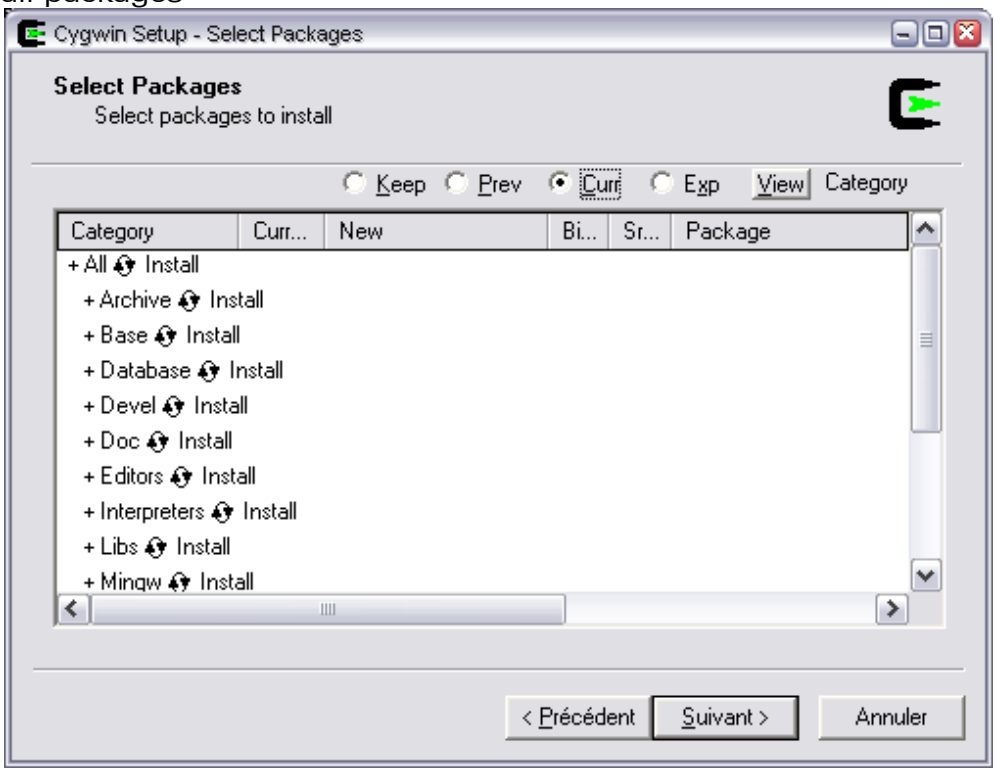


Figure 15 – All packages are selected

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

- Then the Cygwin setup will install all the packages in the selected directory.

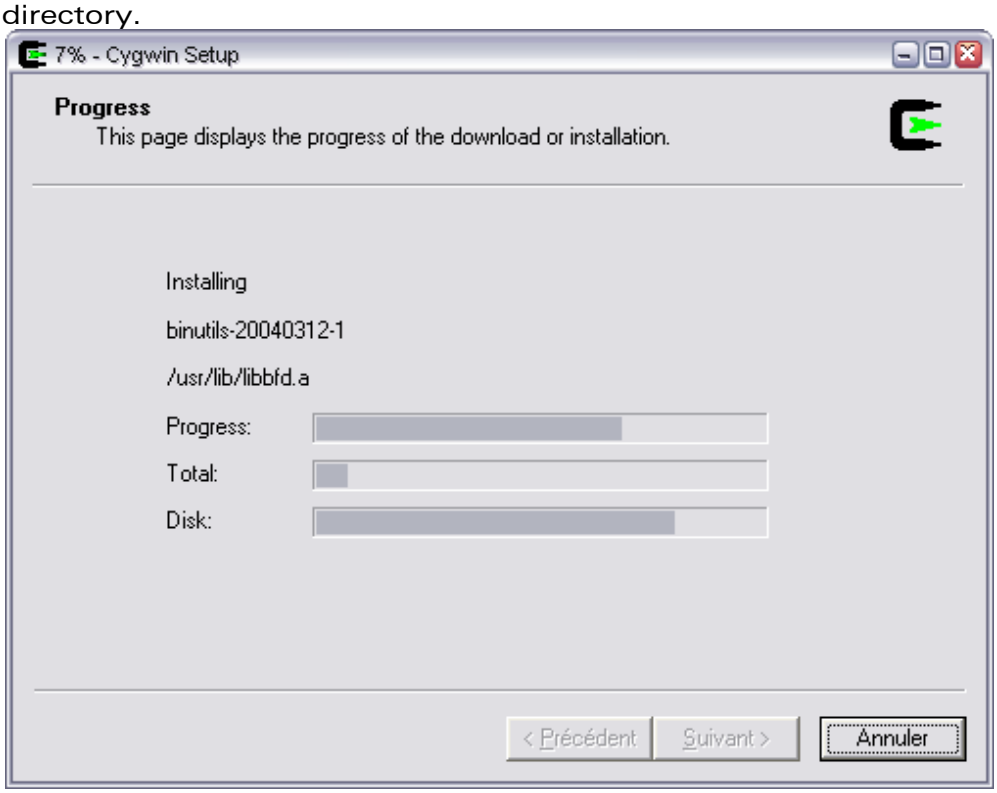


Figure 16 – Cygwin setup is running

- Finally, the Cygwin setup prompts for Icon creation options...

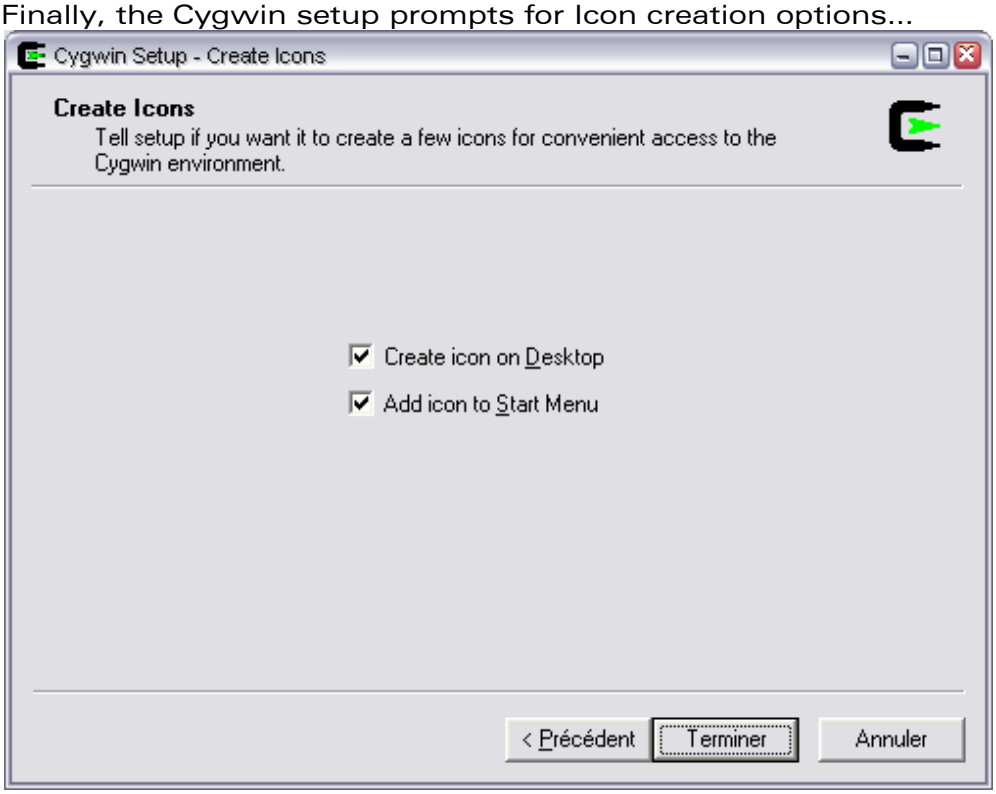


Figure 17 – Cygwin icons options

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

- ... and Cygwin setup is done



Figure 18 – Cygwin setup is done

3.7. File copy and system update

The setup program will now copy the Open AT® SDK files on your hard drive.

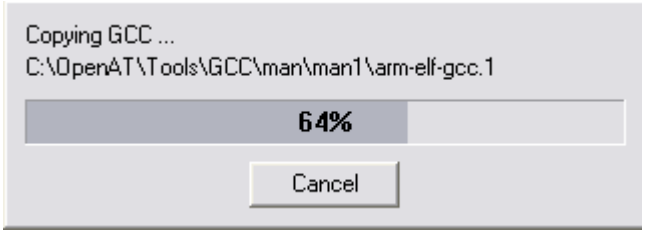


Figure 19 - Open AT® SDK files copy

When the copy is complete, the setup program updates your system.
Then, on Windows NT/2000/XP systems, a simple message box will be displayed; on older systems, the user will be prompted to restart the computer, since environment variables were modified.



Figure 20 – Setup is completed

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3.8. Installed shortcuts in the Start Menu

The Open AT® setup installs three shortcuts in the **Start\Wavecom\OpenAT** menu:

- Open AT® settings application (cf. Tools Manual);
- Open AT® Project Wizard application (cf. Tools Manual);
- Open AT® HTML Read Me, which allows to browse the Samples HTML files, and the provided Documentation PDF files.




Figure 21 – Open AT® shortcuts

3.9. Wavecom Development Toolkit

The Wavecom Development Toolkit is a tools set usable to display debug information, exchange AT commands with the Wavecom products, and handle the serial ports in order to run the remote task environment.

On the Open AT® startup screen (cf. §3, figure 1), select the **"Install Development Toolkit"** option. This starts the Wavecom Development Toolkit Setup program. Please follow the displayed indications to complete this installation.

On Windows 98/ME systems, at the end of the Setup program, please select the **"Yes"** option when you are asked to restart your computer, in order to update your configuration.

3.10. ARM Compiler

In order to build Open AT® application with the ARM compiler, this one must be installed separately on your computer.
After the end of Open AT® and Development Toolkit set up, insert the ARM compiler CD-ROM and run the Setup program. Please follow the indications displayed to complete this installation.

Important Note:
Wavecom SGT browses the directory defined by the **ARMDLL** environment variable to find the ARM compiler binaries (**tcc.exe** and others...).
This environment variable should be set by the ARM compiler setup.
If the **ARMDLL** environment variable is not set, compilation processes with the ARM compiler will fail.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

3.11.Cygwin bash shell settings

The bash shell settings will be automatically updated by the Open AT® setup.

For information, the .bashrc configuration file will be created in the /home/$USER/.bashrc (by default, /home is the C:\Cygwin\home directory under Windows). This file will be updated to start the SGT environment on each bash shell start-up.

3.12.Environment variables setup

Once installed, the environment variables should be modified by the Open AT® Settings application (cf. Tools Manual).

For information, the Open AT® Settings handles the following environment variables on your system.

Variable name	Use
WMATHOME	Location where Open AT® is installed, in Cygwin format (by default /cygdrive/c/OpenAT/{Version}, where {Version} is the installed SDK version)
WMATHOME_DOS	Location where Open AT® is installed, in Windows format (by default C:\OpenAT\{Version}, where {Version} is the installed SDK version)
WMGCCHOME	Location where the GCC cross-compiler is installed, in Cygwin format (by default /cygdrive/c/OpenAT/Tools/GCC/{Version}, where {Version} is the GCC compiler version provided on the SDK)
WMLIBHOME	Location where additional libraries are installed, in Windows format, but with '/' character instead of '\' one (set by default to current WMATHOME/TgtGen/Add-ons sub-directory)
WMTOOLS	Location where common Open AT® tools are installed, in Cygwin format (by default /cygdrive/c/OpenAT/Tools)
SGT_DIR	Location where the Wavecom Software Generation Toolkit is installed, in Cygwin format (by default /cygdrive/c/OpenAT/Tools/SGT/v1.2.11)
WMCOREHOME	Location where the Wavecom OS packages are installed, in Cygwin format (by default /cygdrive/c/OpenAT/Tools/CoreSW)
PATH	The PATH variable has always to include the %WMATHOME_DOS%\TgtGen\WmGen directory

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

4. Support

Our goal is to provide you with professional assistance in the use of the Open AT® software.

4.1. Contact Us

For support, please contact your regular Wavecom contact.

4.2. Online Support

You can get general information and support material on Open AT® at: http://www.wavecom.com

A range of application notes, some with comprehensive source code such as "Graphic Engine" or "Floating Point" libraries are also available in the product support section.

Registered customers will also have access to the Customer Support section to download the latest updates on Open AT®.

4.3. Open AT® Developers Forum

As a developer of Open AT® Applications, you are invited to join the expanding community of developers in the dedicated online forum. Meet other developers and discuss openly any aspect of Open AT® Software whether it be Open AT® IDE, Open AT® OS, Open AT® Plug-Ins or Open AT® Applications. Join now at: www.wavecom.com/forum

4.4. Wavecom University

Whether you are new to Open AT® Software or a seasoned programmer, there is something for everyone in Wavecom University. Sign up for an Open AT® Course today and benefit from a 5 day intensive course, designed and conducted by professional trainers, with a strong emphasis on practical hands on programming. More information at: www.wavecom.com/university

4.5. Open AT® Application Gallery

Does your company have a commercially deployed product in your market that encompasses an Open AT® Application? Why not submit it to our online gallery and display it with pride to a global audience and potentially create additional demand for your product? Submissions can be made at: www.wavecom.com/gallery

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

4.6. GCC compiler support


Wavecom does not offer any support on the GCC cross-compiler provided with the Open AT® SDK. To get assistance on this compiler, please refer to the http://gcc.gnu.org website.

5. Warranty

Caution: All products under warranty that are sent back to Wavecom for repair must be free of any embedded application.

Wavecom will return all Open AT® compatible products under warranty with the default factory configuration.

This document is the sole and exclusive property of WAVECOM. Not to be distributed or divulged without prior written agreement. Ce document est la propriété exclusive de WAVECOM. Il ne peut être communiqué ou divulgué à des tiers sans son autorisation préalable.

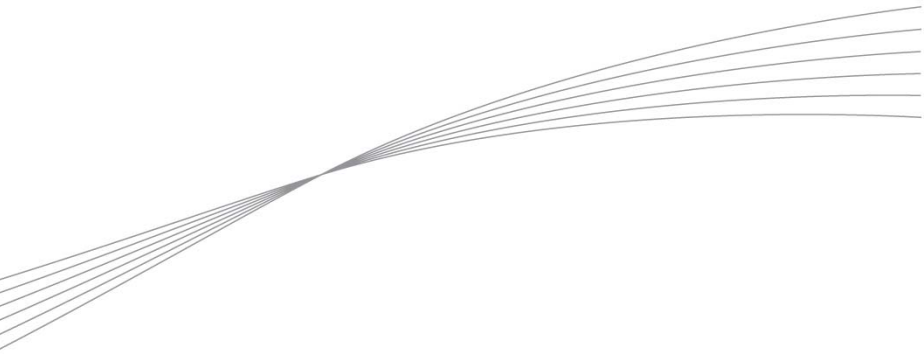

wavecom

Make it wireless

WAVECOM S.A. - 3 esplanade du Foncet - 92442 Issy-les-Moulineaux Cedex - France - Tel: +33(0)1 46 29 08 00 - Fax: +33(0)1 46 29 08 08
Wavecom, Inc. - 4810 Eastgate Mall - Second Floor - San Diego, CA 92121 - USA - Tel: +1 858 362 0101 - Fax: +1 858 558 5485
WAVECOM Asia Pacific Ltd. - Unit 201-207, 2nd Floor, Bio-Informatics Centre – No.2 Science Park West Avenue - Hong Kong Science Park, Shatin - New Territories, Hong Kong